

HIKVISION®



Katalog Retail Hikvision

2025

HIKVISION®

COMPANY PROFILE HIKVISION



Investasi R&D

Lebih dari 11% pendapatan tahunan diinvestasikan pada Penelitian dan Pengembangan (R&D)

Servis Lokal

18 

Pusat Logistik Regional

500+ 

Titik Layanan Purna Jual yang mencakup lebih dari negara atau wilayah

Pertumbuhan Dinamik

Pendapatan 2024

\$13B

26%

Nilai Pertumbuhan Tahunan 2010 hingga 2024

59,000+

Total Karyawan Seluruh Dunia

Cakupan Global

90

Anak perusahaan dan kantor cabang di seluruh dunia

100,000+

Mitra Global

Produk kami telah digunakan

150+

Negara & Wilayah



Lingkup Bisnis

3 Inti Bisnis



Bisnis Layanan Publik

Solusi kota pintar dan lalu lintas pintar untuk keamanan dan tata kelola perkotaan



Bisnis Enterprise


Solusi pintar untuk keamanan dan operasi bisnis di sektor ritel, logistik, energi, pendidikan, dan sebagainya



Bisnis SMB

Solusi terpadu dengan produk pintar, mencakup keamanan video, kontrol akses, interkom, alarm, dan sebagainya

8 Inovatif Bisnis

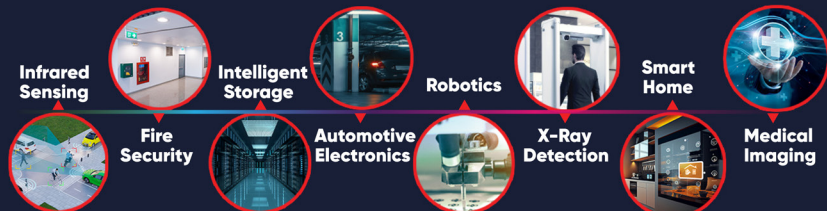

Hikvision Lampu Kamera

Gambar Jernih, Pencahayaan Fleksibel

Infrared & Cahaya Putih Otomatis

saat mendeteksi manusia atau kendaraan.

Spotlight Terfokus

untuk visibilitas lebih jelas & cegah penyusup!



Flexible hybrid-light illumination



Built-in mic & audio over coax

Smart Hybrid Light



DS-2CE18D0T-LFS

- 2MP CMOS Sensor, 1080P@25fps(P)(Default) /30fps(N), 2.8/3.6/6mm Lens
- EXIR, Lamp looking, 40m IR+60m White Light, Outdoor Lamp Cam, ICR, 0.01 Lux/F1.2, Smart LightingWith Acusense DVR
- 12 VDC, DNR, Built-in Mic, Audio up Coaxial (Only TVI), OSD Menu (Up the Coax), IP67, Support TVI/AHD/CVI/CVBS video signal output



DS-2CE16D0T-LPFS

DS-2CE16D0T-LFS

- 2MP CMOS Sensor, 1080P@25fps(P)(Default) /30fps(N), EXIR, 25m IR+20m White Light, 2.8/3.6mm Lens
- Outdoor Dual-light Bullet, ICR, 0.01 Lux/F1.2, Smart IR, DNR, Built-in Mic, Audio up Coaxial (Only TVI), IP67
- Smart LightingWith Acusense DVR, OSD Menu (Up the Coax), 12 VDC
- Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic, (M) Metal



DS-2CE76D0T-LPFS

DS-2CE76D0T-LPF

- 2MP CMOS Sensor, 1080P@25fps(P)(Default) /30fps(N), EXIR, 25m IR+20m White Light, 2.8/3.6mm Lens
- Indoor Dual-light Turret, ICR, 0.01 Lux/F1.2, Smart IR, DNR, Built-in Mic, Audio up Coaxial (Only TVI)
- Smart Lighting With Acusense DVR, OSD Menu (Up the Coax), 12 VDC
- Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic, (M) Metal



DS-2CE16D0T-EXLPF

DS-2CE16D0T-EXLF

- 2MP CMOS Sensor, 1080P@25fps(P)(Default) /30fps(N), EXIR, 20m IR+20m White Light
- Outdoor Dual-light Bullet, ICR, 0.02 Lux/F1.2, 12 VDC, Smart IR, DNR, Smart Lighting With Acusense DVR, OSD Menu (Up the Coax), IP67, 2.8/3.6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic, (M) Metal



DS-2CE76D0T-EXLPF

DS-2CE76D0T-EXLMF

- 2MP CMOS Sensor, 1080P@25fps(P)(Default) /30fps(N), EXIR, 20m IR+20m White Light
- Indoor Dual-light Turret, ICR, 0.02 Lux/F1.2, 12 VDC, Smart IR, DNR, Smart Lighting With Acusense DVR, OSD Menu (Up the Coax), IP67, 2.8/3.6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic, (M) Metal

Teknologi Smart Hybrid Light

Pencahayaan pintar untuk memenuhi beragam kebutuhan

Menerangi jalan untuk keluarga dan tamu Anda dengan lampu otomatis
Pada kondisi normal inframerah, mengeluarkan cahaya pada deteksi manusia atau kendaraan



DS-2CE16K0T-LPFS

DS-2CE16K0T-LFS

- 3K 5MP 16:9 CMOS Sensor, 3K @ 20 fps (Default), 2.8/3.6mm Lens, EXIR 25m IR, White Light 20m
- Outdoor Dual-light Bullet, ICR, 0.01 Lux/F1.2, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI), IP67
- Smart Lighting With Acusense DVR, OSD Menu (Up the Coax)
- Support TVI/AHD/CVI/CVBS video signal output, 12VDC
- (P) : Plastic, (M) : Metal



DS-2CE76K0T-LPFS

DS-2CE76K0T-LFS

- 3K 5MP 16:9 CMOS Sensor, 3K @ 20 fps (Default), 2.8/3.6mm Lens, EXIR 25m IR, White Light 20m
- Indoor Dual-light Turret, ICR, 0.01 Lux/F1.2, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI), IP67
- Smart Lighting With Acusense DVR, OSD Menu (Up the Coax)
- Support TVI/AHD/CVI/CVBS video signal output, 12VDC
- (P) : Plastic, (M) : Metal



DS-2CE16K0T-EXLPF

DS-2CE16K0T-EXLF

- 3K 5MP 16:9 CMOS Sensor, 3K @ 20 fps (Default), 2.8/3.6mm Lens, EXIR 25m IR, White Light 20m
- Outdoor Dual-light Bullet, ICR, 0.02 Lux/F1.2, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI), IP67
- Smart Lighting With Acusense DVR, OSD Menu (Up the Coax)
- Support TVI/AHD/CVI/CVBS video signal output, 12VDC
- (P) : Plastic, (M) : Metal



DS-2CE76K0T-EXLPF

DS-2CE76K0T-EXLMF

- 3K 5MP 16:9 CMOS Sensor, 3K @ 20 fps (Default), 2.8/3.6mm Lens, EXIR 25m IR, White Light 20m
- Indoor Dual-light Turret, ICR, 0.02 Lux/F1.2, Smart IR, DNR, Built-in Mic, Audio up Coaxial(Only TVI), IP67
- Smart Lighting With Acusense DVR, OSD Menu (Up the Coax)
- Support TVI/AHD/CVI/CVBS video signal output, 12VDC
- (P) : Plastic, (M) : Metal

New Turbo HD Cameras

Next-level Night Vision with Smart Hybrid light



IR  White light

 **ColorVu**
Technology


**Built-in mic &
Audio Over Coax**


**Remote Control
via Hikvision app**

 **Smart Hybrid Light**


**Lensa Super Confocal
dengan F1.0**
menetapkan standar untuk gambar
yang selalu tajam


Tiga mode pencahayaan
inframerah, cahaya putih,
dan mode pintar



DS-2CE70DF3T-LMFS

DS-2CE72DF3T-LFS

- 2M BSI CMOS Sensor, 2.8/3.6mm Lens
- Smart hybrid light Turret, 0.0005Lux/F1.0, (CE70) 20m IR+20m White Light, (CE72) 40m IR+40m White Light
- 3D DNR, DC 12V, Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu(Up the Coax), 130dB True WDR, (LM/LF) IP67
- 24H Color, Smart Lighting With Acusense DVR, Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic, (M) Metal



DS-2CE10DF3T-LPFS

DS-2CE10DF3T-LFS

DS-2CE12DF3T-LFS

- 2M BSI CMOS Sensor, 2.8/3.6mm Lens
- Outdoor Smart hybrid light Bullet, 0.0005Lux/F1.0, (CE10) 20m IR+20m White Light, (CE12) 40m IR+40m White Light
- 3D DNR, DC 12V, Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu(Up the Coax), 130dB True WDR, IP67
- 24H Color, Smart Lighting With Acusense DVR, Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic, (M) Metal



DS-2CE10DF0T-LPFS

DS-2CE10DF0T-LFS

- 2M CMOS Sensor, 2.8/3.6mm Lens
- Outdoor Smart hybrid light Bullet, 0.001Lux/F1.0, 20m IR+20m White Light, IP67
- 3D DNR, DC 12V, 130dB True WDR
- Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu(Up the Coax),
- 24H Color, Smart Lighting With Acusense DVR, Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic, (M) Metal



DS-2CE70DF0T-LPFS

DS-2CE70DF0T-LMFS

- 2M CMOS Sensor, 2.8/3.6mm Lens
- Smart hybrid light Turret, 0.001Lux/F1.0, 20m IR+20m White Light, IP67
- 3D DNR, DC 12V, 130dB True WDR
- Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu(Up the Coax),
- 24H Color, Smart Lighting With Acusense DVR, Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic, (M) Metal

Turbo HD 3K Products Family

3K UHD Imaging



16 : 9 Aspect Ratio



24/7 Color imaging




Pengalaman visual terbaik tanpa distorsi

- Berlaku untuk monitor monitor layar lebar standar dengan aspek rasio 16:9
- Bebas distorsi saat pratinjau dan pemutaran video



Other 5 MP (16 : 9) camera
2880 × 1620

Hikvision 3K camera with
ColorVu
2960 × 1665



Informasi visual lebih tajam dengan resolusi tinggi

- Detail lebih jelas dengan gambar tajam berkualitas tinggi

Gambar sangat jelas bahkan dalam kegelapan

- Memastikan pencitraan yg jelas dan bewarna dalam lingkungan dengan cahaya redup



Kamera DFOT 2MP



Kamera KFOT 3K



DS-2CE70KFOT LMFS

DS-2CE70KFOT LPFS

- 3K (5MP 16:9 CMOS Sensor, 3K @ 20 fps(Default), 2.8/3.6mm Lens
- Indoor smart hybrid light Turret, 0.001Lux/F1.0, 20m IR+20m White Light, 2D DNR
- Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu (Up the Coax), 12 VDC
- 24H Color , Smart Lighting With Acusense DVR , Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic , (M) Metal



DS-2CE72KFOT-LFS

- 3K (5MP 16:9 CMOS Sensor, 3K @ 20 fps(Default), 2.8/3.6mm Lens
- Outdoor smart hybrid light Turret, 0.001Lux/F1.0, 40m IR+40m White Light, 2D DNR, IP67
- Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu (Up the Coax), 12 VDC
- 24H Color Smart Lighting With Acusense DVR , Support TVI/AHD/CVI/CVBS video signal output



DS-2CE10KFOT LPFS

DS-2CE10KFOT LFS

- 3K (5MP 16:9 CMOS Sensor, 3K @ 20 fps(Default), 2.8/3.6mm Lens
- Outdoor smart hybrid light mini Bullet, 0.001Lux/F1.0, 20m IR+20m White Light, 2D DNR, IP67
- Built-in Mic, Audio up Coaxial(Only TVI), OSD Menu (Up the Coax), 12 VDC
- 24H Color Smart Lighting With Acusense DVR , Support TVI/AHD/CVI/CVBS video signal output
- (P) Plastic , (M) Metal



Capture richer,
more colorful details



DS-2CE16U1T-IT(x)F

DS-2CE16U7T-IT(3)F

- 8.3MP @12.5fps(Default), 5MP@20fps,
- 4MP@25fps(P)/30fps(N), 2MP@25fps(P)/30fps(N),
- Outdoor EXIR Bullet , ICR, 0.01 Lux/F1.2, 12VDC,
- Smart IR,DNR, OSD Menu(Up the Coax),
- IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic
- UTT : 0.01 Lux, U7T : 0.003 Lux
- (X) : 1: 30m IR, 3: 60m IR, 5: 80m IR



DS-2CE19U1T-IT3ZF

DS-2CE19U1T-AIT3ZF

- 8.3MP @12.5fps(Default), 5MP@20fps,
- 4MP@25fps(P)/30fps(N), 2MP@25fps(P)/30fps(N), EXIR,
- 80m IR, Auto Focus ,
- Outdoor Bullet, ICR, 0.01 Lux/F1.2, Smart IR,
- DNR, OSD Menu(Up the Coax), IP67, 2.7-13.5mm
- Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (A) : 12VDC/AC24V



DS-2CE56U1T-ITZF

DS-2CE56U1T-AITZF

- 8.3MP @12.5fps(Default), 5MP@20fps,
- 4MP@25fps(P)/30fps(N), 2MP@25fps(P)/30fps(N), EXIR,
- 60m IR, Auto Focus ,
- Indoor Dome, ICR, 0.01 Lux/F1.2, 12 VDC/AC24V,
- Smart IR,DNR, OSD Menu (Up the Coa), 2.7-13.5mm
- Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (A) : 12VDC/AC24V



DS-2CE57U1T-VPITF

DS-2CE57U7T-VPITF

- 8.3MP @12.5fps(Default), 5MP@20fps,
- 4MP@25fps(P)/30fps(N), 2MP@25fps(P)/30fps(N),
- EXIR, 30m IR,
- Outdoor Vandal Proof Dome, ICR,
- up to 0.003 Lux/F1.2, 12VDC, Smart IR,DNR, OSD
- Menu(Up the Coax), IP67, 3.6/6/8/12mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- UTT : 0.01 Lux
- U7T : 0.003 Lux



DS-2CE59U1T-(A)VPIT3ZF

DS-2CE59U7T-AVPIT3ZF

- 8.3MP @12.5fps(Default), 5MP@20fps, 4MP@25f-
- ps(P)/30fps(N), 2MP@25fps(P)/30fps(N)
- Motorized Vari-focal Lens 2.7-13.5mm, Auto Focus,
- EXIR, 60m IR
- Outdoor Vandal Proof Dome, ICR, 0.01 Lux/F1.2, IP67
- (A) 12 VDC/AC24V,
- Smart IR,DNR, OSD Menu(Up the Coax),
- Support TVI/AHD/CVI/CVBS video signal output
- UTT : 0.01 Lux, U7T : 0.003 Lux



DS-2CE5AU1T-AVPIT3ZF

- 8.3MP @12.5fps(Default), 5MP@20fps,
- 4MP@25fps(P)/30fps(N), 2MP@25fps(P)/ 30fps(N), EXIR,
- 60m IR, Auto Focus ,
- Outdoor Vandal Proof Dome, ICR, 0.01 Lux/F1.2, 12 VDC/
- AC24V, Smart IR,DNR
- OSD Menu(Up the Coax)
- IP67, 2.7-13.5mm Motorized Vari-focal Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (A) : 12VDC/AC24V



DS-2CE76U1T-IT(P)F

DS-2CE76U7T-ITMF

- 8.3MP @12.5fps(Default), 5MP@20fps,
- 4MP@25fps(P)/30fps(N), 2MP@25fps(P)/ 30ps(N), EXIR,
- 30m IR,
- Indoor EXIR Turret, ICR, up to 0.003 Lux/F1.2, 12VDC,
- Smart IR,DNR,
- OSD Menu(Up the Coax),
- IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- (P) : Plastic, (M) : Metal
- UTT : 0.01 Lux, U7T : 0.003 Lux



DS-2CE78U1T-IT(X)F

DS-2CE78U7T-IT3F

- 8.3MP @12.5fps(Default), 5MP@20fps,
- 4MP@25fps(P)/30fps(N), 2MP@25fps(P)/ 30fps(N), EXIR,
- 30m IR,
- Outdoor EXIR Turret, ICR, 0.01 Lux/F1.2, 12VDC,
- Smart IR,DNR, OSD Menu(Up the Coax),
- IP67,2.8/3.6/6mm Lens
- Support TVI/AHD/CVI/CVBS video signal output
- UTT : 0.01 Lux, U7T : 0.003 Lux
- (X) : 1: 30m IR, 3: 60m IR




DS-2CE79U1T-IT3ZF

- 8.3MP @12.5fps(Default), 5MP@20fps,
- 4MP@25fps(P)/30fps(N), 2MP@25fps(P)/30fps(N), EXIR,
- 60m IR
- Outdoor Turret, IP67, ICR, 0.01 Lux/F1.2, Smart IR,
- DNR, OSD Menu(Up the Coax),
- 2.7-13.5mm Motorized Vari-focal Lens Auto Focus
- 12 VDC, - Support TVI/AHD/CVI/CVBS video signal
- output

DARKFIGHTER

Turbo HD PTZ

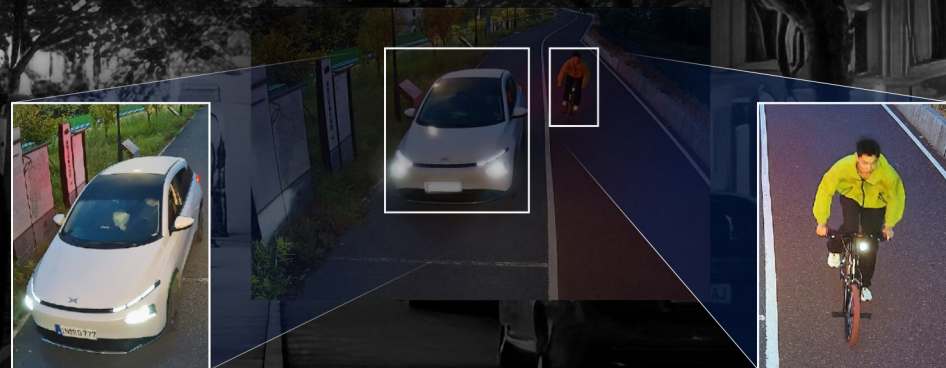

✓ Zoom Optik 25X ✓ WDR 120dB ✓ Teknologi DarkFighter ✓ Pan & Tilt Fleksibel ✓ Jangkauan IR hingga 100M ✓ IP66 Tahan Air & Debu


DS-2AE4225TI-D

- 1/2.8" CMOS, 1920x1080:30fps, TVI & CVBS output,
- 3D DNR, True WDR,
- Ultra-low light Powerde By DarkFighter Color:
- 0.005lux/F1.6, B/W:0.001lux/F1.6, Optical
- Zoom:25x, Digital Zoom:16X,
- Pan Speed: 0.1° ~ 80°/s,
- Tilt Speed: 0.1° ~ 80°/s,
- Up the Coax,100mIR,DC12V


DS-2AE4215TI-D

- 1/2.8" CMOS, 1920x1080:30fps, TVI & CVBS output,
- 3D DNR,
- Ultra-low light Powerde By DarkFighter Color:
- 0.005lux/F1.6, B/W:0.001lux/F1.6,
- Optical Zoom:15x,
- Pan Speed: 0.1° ~ 80°/s,
- Tilt Speed: 0.1° ~ 80°/s,
- Up the Coax,100m IR,DC12V


DS-2AE4225T-D
DS-2AE4225T-D3

- 1/2.8" CMOS, 1920x1080:30fps, TVI & CVBS output,
- 3D DNR, True WDR,
- Ultra-low light Powerde By DarkFighter Color:
- 0.005lux/F1.6, B/W:0.001lux/F1.6,
- Optical Zoom:25x,
- Digital Zoom:16X,
- Up the Coax,DC12V


DS-2AE4215T-D3

- 1/3" CMOS, 1920x1280:30fps, 3D DNR, ICR, Color:
- 0.05lux/F1.4, B/W:0.005lux/F1.4, Optical
- Zoom:15x, Focus:4.0-60mm, Digital Zoom:16X, Pan range:360° endless;
- Tilt range: -5°~90°(Auto Flip),
- Pan Speed: 0.1° ~160°/s,
- Tilt Speed: 0.1° ~120°/s,
- Up the Coax, 24VAC

Motion Detection 2.0

Smart Motion Capture – Lebih Akurat, Lebih Efisien!



Deteksi Cerdas

Notifikasi hanya untuk manusia atau kendaraan.



Langsung Aktif

Tanpa setting, langsung jalan!



Pencarian Cepat

Temukan rekaman dengan mudah.



AcuSense
Technology



IDS-7316HQHI-M4/S

- 16 Turbo HD/CVI / AHD / CVBS interface input, 16-ch video&4-ch audio input, 4-ch IP video input(up to 20-ch IP)
- CH01-16:1920×1080P @15 fps, 4MP Lite @ 15fps/ch,
- 2 RJ45 10M/100M/1000M self-adaptive Ethernet interface
- H.264/H.264+/H.265+/H.265 video compression,
- 4 SATA interface,
- Extended transmission distance over coax cable, 4K UHD output, 1.5U 19" case



IDS-7332HQHI-M4/S

- 32 Turbo HD/CVI / AHD / CVBS interface input, 32-ch video&4-ch audio input, 16-ch IP video input(up to 48-ch IP)
- H.264/H.264+/H.265+/H.265 video compression,
- CH01-32:1920×1080P @15 fps, 4MP Lite @ 15fps/ch
- 2 RJ45 10M/100M/1000M self-adaptive Ethernet interface
- 4 SATA interface
- Extended transmission distance over coax cable, 4K UHD output, 1.5U 19" case




IDS-7332HUHI-M4/S

- 32Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input, 32-ch video&4-ch audio input, 32-ch IP video input(up to 64-ch IP),
- H.264/H.264+/H.265+/H.265 video compression
- 4 SATA interfaces,
- 8MP: 8fps/ch, 5MP: 12 fps/ch, 4MP: 15 fps/ch,
- Extended transmission distance over coax cable
- 4K UHD output, alarm I/O: 16/4, 1.5U 19" case

Turbo HD 8.0

Pandangan Lebih Luas,
Koneksi Lebih Interaktif!



Two-way Audio



24/7 Color

Smart Hybrid Light



Komunikasi Dua Arah

Hingga 5 meter dengan fitur echo cancellation.



Live Guard

Peringatan visual & suara untuk cegah intrusi.



Pencahayaan Fleksibel

Optimalkan keamanan sesuai kebutuhan.

HIKVISION



DS-2CE16D0T-LPTS

- 2MP CMOS Sensor, 1080P@25fps(P)(Default)/30fps(N), EXIR, 30m IR+20m White Light.
- Outdoor Smart-hybrid-light Bullet, ICR, 0.01 Lux/F1.2.
- 12 VDC, Smart IR, DNR, Smart Lighting With Acusense DVR, OSD Menu (Up the Coax),
- IP67
- 2.8/3.6mm Lens,
- Built-in mic and speaker, Intelligent noise reduction, Up to 5 meters of two-way audio with echo cancellation



DS-2CE78D0T-LTS

- 2MP CMOS Sensor, 1080P@25fps(P)(Default)/30fps(N), EXIR, 30m IR+20m White Light
- Indoor Smart-hybrid-light Turret, ICR, 0.01 Lux/F1.2.
- 12 VDC, Smart IR, DNR, Smart Lighting With Acusense DVR, OSD Menu (Up the Coax),
- IP67
- 2.8/3.6mm Lens,
- Built-in mic and speaker, Intelligent noise reduction, Up to 5 meters of two-way audio with echo cancellation



DS-2CE70D0T-PTLTS

- 2MP CMOS Sensor, 1080P@25fps(P)(Default)/30fps(N), EXIR, 30m IR+20m White Light,
- Indoor Smart-hybrid-light PT Turret, ICR, Turret, ICR, 0.01 Lux/F1.2,
- 12 VDC, Smart IR, DNR, Smart Lighting, With Acusense DVR, OSD Menu (Up the Coax),
- IP67,
- 2.8/3.6mm Lens,
- Built-in mic and speaker, Intelligent noise reduction,
- Up to 5 meters of two-way audio with echo cancellation



DS-2CE16K0T-LPTS

- 3K SMP 16:9 CMOS Sensor, 3K @ 20 fps (Default), EXIR, 25m IR+20m White Light, 2.8/3.6mm Lens
- Outdoor Smart-hybrid-light Bullet, ICR, 0.01 Lux/F2.0, 12 VDC, Smart IR, DNR, Smart Lighting With Acusense DVR, OSD Menu (Up the Coax), IP67,
- Built-in mic and speaker, Intelligent noise reduction, Up to 5 meters of two-way audio with echo cancellations



DS-2CE78K0T-LTS

- 3K SMP 16:9 CMOS Sensor, 3K @ 20 fps (Default), EXIR, 40m IR+40m White Light, 2.8/3.6mm Lens,
- Indoor Smart-hybrid-light Turret, ICR, 0.01 Lux/F2.0,
- 12 VDC, Smart IR, DNR, Smart Lighting With Acusense DVR, OSD Menu (Up the Coax),
- IP67
- Built-in mic and speaker, Intelligent noise reduction, Up to 5 meters of two-way audio with echo cancellation



DS-2CE70K0T-PTLTS

- 3K SMP 16:9 CMOS Sensor, 3K @ 20 fps (Default), EXIR, 25m IR+20m White Light, 2.8/3.6mm Lens
- Indoor Smart-hybrid-light PT Turret, ICR, 0.01 Lux/F2.0, 12 VDC, Smart IR, DNR, Smart Lighting With Acusense DVR, OSD Menu (Up the Coax), IP67,
- Built-in mic and speaker, Intelligent noise reduction, Up to 5 meters of two-way audio with echo cancellations



IDS-7204HQHI-M1/XT

IDS-7208HQHI-M1/XT

IDS-7216HQHI-M1/XT

- Support TVI Two-way Audio.
- 1/2/4-ch facial recognition or 2/4/8-ch advanced model perimeter protection
- 4/8/16 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input,
- 4/8/16 - ch video&1-ch audio input, H.265/H.265+ compression, 1 SATA interface.
- Live view: 3K Lite@20fps/ch, up to 3K Lite@12fps/ch encoding capability, support CVBS output,



IDS-7208HQHI-M2/XT

IDS-7216HQHI-M2/XT

IDS-7232HQHI-M2/XT

- Support TVI Two-way Audio
- 3K Lite@20fps/ch, up to 3K Lite@12fps/ch encoding capability, 4K UHD output, support CVBS output, 380 1U case
- Support TVI Two-way Audio, 8/16/32 Turbo HD/CVI / AHD / CVBS self-adaptive interfaces input
- 2/4 ch facial recognition or 4/8-ch advanced model perimeter protection
- 8/16/32 ch video&1-ch audio input, 4/8 ch IP video input, H.265/H.265+ compression, 2 SATA interfaces



IDS-7204HTHI-M1/XT

IDS-7204HTHI-M2/XT

IDS-7208HTHI-M2/XT

- Support TVI Two-way Audio,
- 2/4 ch facial recognition or 4/8 ch advanced model false alarm filter, 4-ch HDTVI coaxial video&audio input, 4-ch IP video input (up to 8-ch IP), H.265+/H.265 compression, 1/2 SATA interfaces, encoding capability:
- 4/8 Ch 8 MP@15fps, 3K/5 MP@20fps, 4MP/1080p@25fps (P)/30fps (N),
- Extended transmission distance over coax cable, 4K UHD output, alarm, standalone 1U case

SMART HYBRID LIGHT TECHNOLOGY

Pencahayaan pintar membantu menangkap object utama secara detail dan efektif


DS-2CD1321G2-LIU
DS-2CD1321G2-LIUF

- 1/2.8" Progressive CMOS, ICR,
- 2MP (1920x1080):25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, IP67, DWDR, 3D DNR, BLC, IR range: up to 20m
- Built-in Microphone,
- Support Human body detection based on AI,
- DC12V & PoE
- F: TF card slot


DS-2CD1121G2-LIU
DS-2CD1141G2-LIUF

- 1/2.8" Progressive CMOS, ICR,
- 2MP (1920x1080):25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR range: up to 20m
- Built-in Microphone,
- Support Human body detection based on AI,
- DC12V & PoE
- F: TF card slot


DS-2CD1021G2-LIU
DS-2CD1021G2-LIUF

- 1/2.8" Progressive CMOS, ICR
- 2MP (1920x1080):25fps(P)/30fps(N),
- H.265+/H.265/H.264+&H.264, IP67, DWDR, 3D DNR, BLC, IR range: up to 20m
- Built-in Microphone,
- Support Human body detection based on AI,
- DC12V & PoE
- F: TF card slot


DS-2CD1341G2-LIU
DS-2CD1341G2-LIUF

- 1/2.8" Progressive CMOS, ICR,
- 4MP (2560x1440):20fps(P)/N
- H.265+/H.265/H.264+&H.264, IP67, DWDR, 3D DNR, BLC, IR range: up to 20m
- Built-in Microphone,
- Support Human body detection based on AI,
- DC12V & PoE
- F: TF card slot


DS-2CD1141G2-LIU
DS-2CD1141G2-LIUF

- 1/2.8" Progressive CMOS, ICR,
- 4MP (2560x1440):20fps(P)/N
- H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR range: up to 20m
- Built-in Microphone,
- Support Human body detection based on AI,
- DC12V & PoE
- F: TF card slot


DS-2CD1041G2-LIU
DS-2CD1041G2-LIUF

- 1/2.8" Progressive CMOS, ICR
- 2MP (1920x1080):25fps(P)/30fps(N),
- 4MP (2560x1440):20fps(P)/N
- H.265+/H.265/H.264+&H.264, IP67, DWDR, 3D DNR, BLC, IR range: up to 20m
- Built-in Microphone,
- Support Human body detection based on AI,
- DC12V & PoE
- F: TF card slot


DS-2CD1021G0-I
DS-2CD1021G0-IU

- 1/3" Progressive CMOS ICR
- 1920 × 1080: 25fps(P)/30fps(N)
- H.265+/H.265/H.264+&H.264
- DWDR, 3D DNR, BLC
- IR range: up to 30m
- DC12V & PoE
- IU :Built-in microphone


DS-2CD1121G0-I

- 1/3" Progressive CMOS ICR
- 1920 × 1080: 25fps(P)/30fps(N)
- H.265+/H.265/H.264+&H.264
- DWDR, 3D DNR, BLC
- R range: up to 30m
- DC12V & PoE


DS-2CD1321G0-I
DS-2CD1321G0-IU

- 1/3" Progressive CMOS ICR
- 1920 × 1080: 25fps(P)/30fps(N)
- H.265+/H.265/H.264+&H.264
- DWDR, 3D DNR, BLC
- IR range: up to 30m
- DC12V & PoE
- IU :Built-in microphone

Smart Hybrid LIGHT

Lebih cerdas di malam hari lampu hanya menyala saat mendeteksi manusia atau kendaraan. Hemat energi tanpa mengorbankan keamanan

IR  White light 



DS-2CD1321G2-LIUF/SL

DS-2CD1341G2-LIUF/SL

- 1/2.8" Progressive CMOS, ICR,
- 2MP (1920x1080) :25fps(P)/30fps(N),
- 4MP (2560x1440) :20fps(P)/(N),
- H.265+/H.265/H.264+&H.264, IP67, DWDR, 3D DNR, BLC, IR range: up to 20m
- Built-in microphone & speaker, audio & strobe light alarm
- Support Human body detection based on AI,
- DC12V & PoE;



DS-2CD1021G2-LIUF/SL

DS-2CD1041G2-LIUF/SL

- 1/2.8" Progressive CMOS, ICR,
- 2MP (1920x1080) :25fps(P)/30fps(N),
- 4MP (2560x1440) :20fps(P)/(N),
- H.265+/H.265/H.264+&H.264, IP67, DWDR, 3D DNR, BLC, IR range: up to 20m
- Built-in microphone & speaker, audio & strobe light alarm
- Support Human body detection based on AI,
- DC12V & PoE;



DS-2CD1623G2-LIZSU

- 1/3" Progressive CMOS, ICR, 1920 × 1080:
- 25fps(P)/30fps(N), H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR or white light range: up to 50m, Built-in microphone, SD Card Slot (up to 256GB), DC12V & PoE, Support mobile monitoring via Hik-Connect
- *-S: alarm and audio
- *power supply is not included



DS-2CD1723G2-LIZSU

- 1/3" Progressive CMOS, ICR, 1920 × 1080:
- 25fps(P)/30fps(N), H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR or white light range: up to 30m, Built-in microphone, SD Card Slot (up to 256GB), DC12V & PoE, Support mobile monitoring via Hik-Connect
- *-S: alarm and audio
- *power supply is not included



DS-2CD1T23G2-LIUF

DS-2CD1T43G2-LIUF

- 1/3" Progressive CMOS, IR
- 1T23:1920 × 1080: 25fps(P)/30fps(N)
- 1T43:2560 × 1440: 20fps(P)/(N),
- H.265+/H.265/H.264+&H.264,
- DWDR, 3D DNR, BLC,
- IR or white light range: up to 50m,
- Built-in microphone
- DC12V & PoE, Support mobile monitoring via
- Hik-Connect
- F: SD Card Slot (up to 256GB)



DS-2CD1T63G2-LIUF

DS-2CD1T83G2-LIUF

- 1/3" Progressive CMOS, IR
- 3200 × 1800: 20fps(P)/(N),
- 3840 × 2160: 12.5fps(P)/15fps(N)
- H.265+/H.265/H.264+&H.264,
- DWDR, 3D DNR, BLC,
- IR or white light range: up to 50m,
- Built-in microphone
- DC12V & PoE, Support mobile monitoring via
- Hik-Connect
- F: SD Card Slot



DS-2CD1023G2-LIUF

DS-2CD1023G2-LIUF

DS-2CD1043G2-LIUF

DS-2CD1043G2-LIUF

- 1/3" Progressive CMOS, ICR,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N), H.265+/H.265/H.264+&H.264,
- DWDR, 3D DNR, BLC,
- IR or white light range: up to 30m,
- Built-in microphone, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- (F): SD Card Slot (up to 256GB)



DS-2CD1123G2-LIUF

DS-2CD1123G2-LIUF

DS-2CD1143G2-LIUF

DS-2CD1143G2-LIUF

- 1/3" Progressive CMOS, ICR,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N), H.265+/H.265/H.264+&H.264,
- DWDR, 3D DNR, BLC,
- IR or white light range: up to 30m,
- Built-in microphone, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- (F) : SD Card Slot (up to 256GB)



DS-2CD1323G2-LIUF

DS-2CD1323G2-LIUF

DS-2CD1343G2-LIUF

DS-2CD1343G2-LIUF

- 1/3" Progressive CMOS, ICR, 1920x1080:
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N), H.265+/H.265/H.264+&H.264,
- DWDR, 3D DNR, BLC,
- IR or white light range: up to 30m,
- Built-in microphone, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- (F) : SD Card Slot (up to 256GB)

NEXT-LEVEL

Penglihatan Malam dengan Pencahayaan Cerdas

White light

IR



DS-2CD1027G2H-LIU

DS-2CD1027G2H-LIUF

DS-2CD1047G2H-LIU

DS-2CD1047G2H-LIUF

- 1/3" Progressive CMOS, ICR, H.265+/H.265/
- H.264+&H.264, DWDR, 3D DNR, BLC,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N),
- IR or white light range: up to 30m, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- UF: Build-in microphone & SD Card Slot
- (up to 512GB),



DS-2CD1327G2H-LIU

DS-2CD1327G2H-LIUF

DS-2CD1347G2H-LIU

DS-2CD1347G2H-LIUF

- 1/3" Progressive CMOS, ICR, H.265+/H.265/
- H.264+&H.264, DWDR, 3D DNR, BLC,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N),
- IR or white light range: up to 30m, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- UF: Build-in microphone & SD Card Slot
- (up to 512GB),



DS-2CD1127G2H-LIU

DS-2CD1127G2H-LIUF

DS-2CD1147G2H-LIU

DS-2CD1147G2H-LIUF

- 1/3" Progressive CMOS, ICR, H.265+/H.265/
- H.264+&H.264, DWDR, 3D DNR, BLC,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N),
- IR or white light range: up to 30m, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- UF: Build-in microphone & SD Card Slot
- (up to 512GB),



DS-2CD1T27G2H-LIU

DS-2CD1T27G2H-LIUF

DS-2CD1T47G2H-LIU

DS-2CD1T47G2H-LIUF

- 1/3" Progressive CMOS, ICR, H.265+/H.265/
- H.264+&H.264, DWDR, 3D DNR, BLC,
- 4MP : 2560x1440: 20fps(P)/(N), 2MP : 1920x1080:
- 25fps(P)/30fps(N),
- IR or white light range: up to 50m, DC12V & PoE,
- Support mobile monitoring via Hik-Connect
- UF: Build-in microphone & SD Card Slot
- (up to 512GB),

Menjadikan AI Sebagai Standar Baru

Teknologi Hikvision AcuSense



FOCUS and ACT



Motion Detection
2.0



Perimeter-Protection
Analytics



Live Guard



Quick Target
Search



DS-2CD2023G2-LI

DS-2CD2023G2-LI2U

DS-2CD2043G2-LI

DS-2CD2043G2-LI2U

DS-2CD2063G2-LI

DS-2CD2063G2-LI2U

- 1/2.8" Progressive Scan CMOS;
- 6 MP : 20fps(3200x1800), 4MP : 25fps/30fps(2688x1520), 2MP : 25fps/30fps (1920x1080);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR;
- VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; 3000K Warm LED; EXIR, up to 40m;
- DC12V&PoE; Built-in micro SD/SDHC/SDXC slot;
- Hik-Connect cloud service
- 2U: Built-in Dual-Array Microphone



DS-2CD2123G2-LI

DS-2CD2123G2-LI2U

DS-2CD2143G2-LI

DS-2CD2143G2-LI2U

DS-2CD2163G2-LI

DS-2CD2163G2-LI2U

- 1/2.8" Progressive Scan CMOS;
- 6 MP : 20fps(3200x1800), 4MP : 25fps/30fps(2688x1520), 2MP : 25fps/30fps (1920x1080);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR;
- VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; 3000K Warm LED; EXIR, up to 30m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; ' Hik-Connect cloud service
- *S model: Audio/Alarm IO
- *2U: Built-in Dual-Array Microphone



DS-2CD2323G2-LI

DS-2CD2323G2-LI2U

DS-2CD2343G2-LI

DS-2CD2343G2-LI2U

DS-2CD2363G2-LI

DS-2CD2363G2-LI2U

- 1/2.8" Progressive Scan CMOS;
- 6 MP : 20fps(3200x1800), 4MP : 25fps/30fps(2688x1520), 2MP : 25fps/30fps (1920x1080);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR;
- VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; 3000K Warm LED; EXIR, up to 40m;
- DC12V&PoE; Built-in micro SD/SDHC/SDXC slot;
- Hik-Connect cloud service
- * -2U: Built-in Dual-Array Microphone



DS-2CD2T23G2-2LI2U

DS-2CD2T23G2- 4LI2U

DS-2CD2T43G2-2LI2U

DS-2CD2T43G2-4LI2U

DS-2CD2T63G2-2LI2U

DS-2CD2T63G2-4LI2U

- 1/2.8" Progressive Scan CMOS;
- 6 MP : 20fps(3200x1800), 4MP : 25fps/30fps(2688x1520), 2MP : 25fps/30fps (1920x1080);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR;
- 3D DNR; BLC/HLC; ICR; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; Hik-Connect cloud service
- *2LI/4LI model: 3000K Warm LED; EXIR, up to 60m/80m
- * 2U: Built-in Dual-Array Microphone



DS-2CD2523G2-LIS2U

DS-2CD2543G2-LIS2U

DS-2CD2563G2-LIS2U

- 1/2.8" Progressive Scan CMOS;
- 6MP(3200x1800) 25fps, 4MP (2688x1520) 25fps/30fps, 2MP(1920x1080) 25fps/30fps
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.005 Lux @ (F1.6, AGC ON), 0 lux with IR; 25fps/30fps(1920x1080);
- VCA functions; 3 streams;
- 3D DNR; BLC/HLC; ICR; 3000K Warm LED;
- EXIR, up to 30m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; Hik-Connect cloud service;
- *-S model: Audio/Alarm IO
- *-2U: Built-in Dual-Array Microphone



DS-2CD2423G2-I

DS-2CD2443G2-I

DS-2CD2463G2-I

- 1/2.8" Progressive Scan CMOS;
- H.265+/H.265/MJPEG;
- Color: 0.008 lux@ (F2.0, AGC ON), 0 lux with IR;
- 6MP : 12.5fps/15fps(3200x1800), 4MP : 25fps/30fps (2688x1520), 2MP : 25fps/30fps (1920x1080);
- VCA functions; 3 streams; 3D DNR; BLC/HLC; ICR; EXIR, up to 10m; DC12V&PoE;
- Built-in mic&speaker; Built-in micro SD/SDHC/SDXC slot; Hik-Connect cloud service;


DS-2CD2086G2H-I
DS-2CD2086G2H-IU
DS-2CD2046G2H-I
DS-2CD2046G2H-IU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840×2160);25fps/30 fps (3200×1800, 2688×1520, 1920×1080, 1280×720)
- 4MP:25fps/30fps (2688×1520, 1920×1080, 1280×720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light;
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U:Built-in microphone


DS-2CD2T86G2H-2I
DS-2CD2T86G2H-4I
DS-2CD2T46G2H-2I
DS-2CD2T46G2H-4I

- 1/1.8" Progressive Scan CMOS;25fps/24fps(3840×2160);25fps/30 fps (3200×1800, 2688×1520, 1920×1080, 1280×720)
- 4MP:25fps/30fps (2688×1520, 1920×1080, 1280×720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light;
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; EXIR; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- *-2I/4I model: up to 60m(2Leds)/80m(4Leds) IR distance


DS-2CD2186G2H-I
DS-2CD2186G2H-ISU
DS-2CD2146G2H-I
DS-2CD2146G2H-ISU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840×2160);25fps/30 fps (3200×1800, 2688×1520, 1920×1080, 1280×720)
- 4MP:25fps/30fps (2688×1520, 1920×1080, 1280×720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light;
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U:Built-in microphone


DS-2CD2686G2HT-IZS
DS-2CD2646G2HT-IZS

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.2, AGC ON),0 Lux with light
- 4K 25fps/24fps(3840×2160, 3200×1800, 2688×1520, 1920×1080, 1280×720)
- 4MP 25fps/30fps (2688×1520, 1920×1080, 1280×720);
- VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Junction box is included in the camera package


DS-2CD2386G2H-I
DS-2CD2386G2H-IU
DS-2CD2346G2H-I
DS-2CD2346G2H-IU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840×2160);25fps/30 fps (3200×1800, 2688×1520, 1920×1080, 1280×720)
- 4MP:25fps/30fps (2688×1520, 1920×1080, 1280×720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON),0 Lux with light;
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- -U:Built-in microphone


DS-2CD2786G2HT-IZS
DS-2CD2746G2HT-IZS

- 1/1.8" Progressive Scan CMOS; 25fps/24fps(3840×2160);25fps/30 fps (3200×1800, 2688×1520, 1920×1080, 1280×720)
- 4MP:25fps/30fps (2688×1520, 1920×1080, 1280×720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.2, AGC ON),0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED;IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- *Junction box is included in the camera package

DarkFighterX
**FOCUS
and
ACT**
**AcuSense
Technology**

Kamera dengan lampu strobo

Live Guard

Perlindungan proaktif, sepanjang hari



DS-2CD2086G2H-I2U/SL

DS-2CD2066G2H-I2U/SL

DS-2CD2046G2H-I2U/SL

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON), 0 Lux with light;
- 8/6/4MP, 25fps/24fps(3840×2160); 25fps/30 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)
- VCA functions; 3 streams; 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; Hik-Connect+K63; K81t cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker;
- Strobe light & Audio alarm;



DS-2CD2386G2H-IS2U/SL

DS-2CD2366G2H-IS2U/SL

DS-2CD2346G2H-IS2U/SL

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON), 0 Lux with light;
- 8/6/4MP, 25fps/24fps(3840×2160); 25fps/30 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)
- VCA functions; 3 streams; 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; Hik-Connect+K63; K81t cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker;
- Strobe light & Audio alarm;



DS-2CD2T86G2H-IS2U/SL

DS-2CD2T66G2H-IS2U/SL

DS-2CD2T46G2H-IS2U/SL

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.0, AGC ON), 0 Lux with light;
- 8/6/4MP, 25fps/24fps(3840×2160); 25fps/30 fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)
- VCA functions; 3 streams; 3D DNR; BLC; ICR; EXIR, Up to 40 m; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; Hik-Connect+K63; K81t cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker;
- Strobe light & Audio alarm;



DS-2CD2686G2HT-IZS2U/SL

DS-2CD2666G2HT-IZS2U/SL

DS-2CD2646G2HT-IZS2U/SL

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.2, AGC ON), 0 Lux with light;
- 25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; Hik-Connect cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker; Strobe light & Audio alarm;
- *Junction box is included in the camera package



PTZR for SMB

DS-2CD2786G2H-IPTRZS2U/SL

DS-2CD2766G2H-IPTRZS2U/SL

DS-2CD2746G2H-IPTRZS2U/SL

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.2, AGC ON), 0 Lux with light;
- 25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; Hik-Connect cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker; Strobe light & Audio alarm;



DS-2CD2687G3-LIZS2UY/SL

DS-2CD2647G3-LIZS2UY/SL

COLOVU 3.0

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.001 Lux @ (F1.2, AGC ON), 0 Lux with light;
- 25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; Hik-Connect cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker; Strobe light & Audio alarm;
- Anti-Corrosion;

HIKVISION



ColorVu
+ Verifocal



ColorVu
+ 4K



ColorVu
+ Deep Learning



Jernih Siang & Malam

Kamera PTRZ

Revolusi Dome, tanpa bongkar cover !



DS-2CD2087G2H-LI

DS-2CD2087G2H-LIU

DS-2CD2047G2H-LI

DS-2CD2047G2H-LIU

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); 4MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m
- DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U: Built-in microphone



DS-2CD2187G2H-LI

DS-2CD2187G2H-LISU

DS-2CD2147G2H-LI

DS-2CD2147G2H-LISU

- 1/1.8" Progressive Scan CMOS; 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); 4MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 30m
- DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- -U: Built-in microphone



DS-2CD2387G2H-LI

DS-2CD2387G2H-LIU

DS-2CD2347G2H-LI

DS-2CD2347G2H-LIU

- 1/1.8" Progressive Scan CMOS; 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); 4MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m
- DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- U: Built-in microphone



DS-2CD2T87G2H-LI

DS-2CD2T47G2H-LI

- 1/1.8" Progressive Scan CMOS; 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); 4MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m
- DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;



DS-2CD2687G2HT-LIZS

DS-2CD2667G2HT-LIZS

DS-2CD2647G2HT-LIZS

- 1/1.8" Progressive Scan CMOS; 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720); 6MP:25fps/30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 24 fps(3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- VCA functions; 3 streams;
- 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m
- DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;



PTRZ Cameras

DS-2CD2787G2H-LIPTRZS

DS-2CD2767G2H-LIPTRZS

DS-2CD2747G2H-LIPTRZS

- 1/1.8" Progressive Scan CMOS;
- H.265+/H.265/H.264+/H.264/MJPEG;
- 8/6/7MP, (3840 × 2160), (3200 × 1800), (2688 × 1520), (1920 × 1080), (1280 × 720) 25fps/24fps
- Color: 0.0008 Lux @ (F1.2, AGC ON), 0 Lux with light
- VCA functions; 3 streams; 3D DNR; BLC; ICR;
- 3000K Warm LED; IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot
- HIK-Connect cloud service



DS-2CD2787G2HT-LIZS

DS-2CD2767G2HT-LIZS

DS-2CD2747G2HT-LIZS

- 1/1.8" Progressive Scan CMOS;
- 4K:25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720);
- 6MP:25fps/30fps (3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720) 60 Hz: 24 fps(3200 × 1800), 30fps (2688 × 1520, 1920 × 1080, 1280 × 720);
- 2MP:25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0008 Lux @ (F1.2, AGC ON), 0 Lux with light
- VCA functions; 3 streams
- 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;

HIK AI-ISP



Brilliant AI Noise Reduction

Phone illumination *Taken at 1:00am




* Without supplemental light



ColorVu 3.0
Without supplemental light



Better WDR Effect



DS-2CD2087G3-LIY

DS-2CD2087G3-LI2UY

DS-2CD2047G3-LIY

DS-2CD2047G3-LI2UY

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- 4K 25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)
- 4MP 25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker; Strobe light & Audio alarm;



DS-2CD2387G3-LIY

DS-2CD2387G3-LI2UY

DS-2CD2347G3-LIY

DS-2CD2347G3-LI2UY

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- 4K 25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)
- 4MP 25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker; Strobe light & Audio alarm;
- Anti-Corrosion;



DS-2CD2187G3-LIY

DS-2CD2187G3-LI2UY

DS-2CD2147G3-LIY

DS-2CD2147G3-LI2UY

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- 4K 25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)
- 4MP 25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 40m DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker; Strobe light & Audio alarm;
- Anti-Corrosion;



DS-2CD2187G3-LIY

DS-2CD2187G3-LIS2UY


DS-2CD2147G3-LIY

DS-2CD2147G3-LIS2UY

- 1/1.8" Progressive Scan CMOS; H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with light
- 4K 25fps/24fps(3840 × 2160, 3200 × 1800, 2688 × 1520, 1920 × 1080, 1280 × 720)
- 4MP 25fps/30fps(2688 × 1520, 1920 × 1080, 1280 × 720);
- VCA functions; 3 streams; 3D DNR; BLC; ICR; 3000K Warm LED; IR, up to 30m DC12V&PoE; Built-in micro SD/SDHC/SDXC slot; HIK-Connect cloud service;
- Two-way audio; Built-in Dual-Array Microphone and enhanced speaker; Strobe light & Audio alarm;
- Anti-Corrosion;

SMB Solutions For Business

Grow your business with one-stop SMB solutions

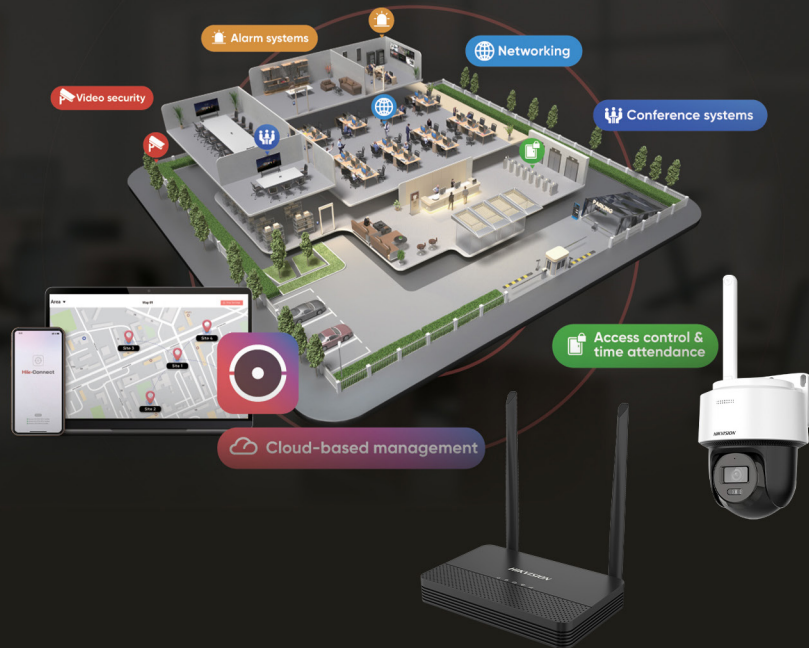

Manajemen & pengoperasian keamanan kantor yang mudah **di lokasi dan jarak jauh** dengan **sambungan Nirkabel**



DS-2CV1043G2-LIDWF(B)

- 1/3" Progressive CMOS, ICR, 0lux with IR, 1920×1080: 15fps(P/N)
- H.265+/H.265/H.264+/H.264, DWDR, 3D DNR
- Build-in microphone
- Build-in 2.4G Wi-Fi 802.11b/g/n.



DS-2CV1F43G2-LIDWF(B)

- 1/3" Progressive CMOS, ICR, 0lux with IR, 2560×1440: 15fps(P/N), --H.265+/H.265/H.264+/H.264, DWDR, 3D DNR,
- Build-in microphone; Build-in 2.4G Wi-Fi 802.11b/g/n,
- Support PT Function.



DS-2DE2C400MWG WIFI

- 1/2.7 Progressive Scan CMOS
- Color: 0.005 Lux @(F1.6 AGC ON), B/W: 0 Lux with IR
- 2.8 mm, horizontal FOV 91°, vertical FOV 49°, diagonal FOV 108°
- 4 mm, horizontal FOV 74°, vertical FOV 40°, diagonal FOV 87°
- White Light Distance: up to 30 m IR Distance: up to 30 m
- Digital WDR, BLC, HLC, 3D DNR, Built-in Microphone, Built-in Speaker, audible warning when alarm triggers



DS-2CD1043G2-LIDUF/4G/SL

- 1/3" Progressive CMOS, ICR, 2560 × 1440: 15fps(P/N),
- H.265+/H.265/H.264+&H.264, DWDR, 3D DNR, BLC, IR or white light range: up to 30m,
- Built-in microphone & speaker, support two-way-talk, audio & strobe light alarm,
- Built-in 4G Cat 1 module, DC12V, Support mobile monitoring via Hik-Connect;



DS-7104NI-S1/W

- 4-ch camera input, Up to 512 GB Micro SD card storage capacity;
- Wireless Parameter 2.4 GHz, 150 Mbps, IEEE 802.11b/g/n/ax, High gain antenna



DS-2CD1043G2-LIDUF/4G/SL

- 1/2.7 Progressive Scan CMOS Color: 0.005 Lux @(F1.6 AGC ON), B/W: 0 Lux with IR
- 2.8 mm, horizontal FOV 94°, vertical FOV 49°, diagonal FOV 114°
- 4 mm, horizontal FOV 70°, vertical FOV 35°, diagonal FOV 85°
- White Light Distance: up to 30 m IR Distance: up to 30 m
- Digital WDR, BLC, HLC, 3D DNR, Built-in Microphone, Built-in Speaker, audible warning when alarm triggers
- Built-in 4G Cat 1 module, DC12V, Support mobile monitoring via Hik-Connect;



Seri Kamera Panorama

Lensa ganda lengkap

dalam satu tampilan.

Dual-lens  Stitching



Pemantauan yang luas



Instalasi lebih mudah



Fitur lengkap & Modern

Two-way Audio



DS-2CD2387G2P-LSU/SL (C)

DS-2CD2347G2P-LSU/SL (C)

- 4K:2*1/1.8" Progressive Scan CMOS 20fps(5120×1440),
- 4 MP+4 MP resolution, 4MP:2*1/2.5" Progressive Scan CMOS; 25/24fps(3040×1368), 3 MP+3 MP resolution H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 lux @(F1.0, AGC ON), 0 lux with LED on;
- VCA functions; 2 streams; 3D DNR; BLC; ICR; 3000K Warm LED; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; Hik-Connect cloud service;
- Built-in microphone and speaker, Audio/Alarm I/O; 180° FOV



DS-2CD2T87G2P-LSU/SL (C)

DS-2CD2T47G2P-LSU/SL (C)

- 4K:2*1/1.8" Progressive Scan CMOS; 20fps(5120×1440),
- 4 MP+4 MP resolution, 4MP:2*1/2.5" Progressive Scan CMOS; 25/24fps(3040×1368) 3 MP+3 MP resolution H.265+/H.265/H.264+/H.264/MJPEG;
- Color: 0.0005 lux @(F1.0, AGC ON), 0 lux with LED on;
- VCA functions; 2 streams; 3D DNR; BLC; ICR; 3000K Warm LED; DC12V&PoE;
- Built-in micro SD/SDHC/SDXC slot; Hik-Connect cloud service;
- Built-in microphone and speaker, Audio/Alarm I/O; 180° FOV



DS-2CD2955G0-ISU

- 1/2.8" Progressive Scan CMOS
- H.265/H.264/MJPEG
- Powered by Darkfighter technology, Color: 0.009 lux @(F1.6, AGC ON), 0 lux with IR
- 50fps/60fps(1920×1080)
- VCA functions, 3 streams, 3D DNR, BLC/HLC, ICR, EXIR, up to 30m, DC12V&PoE, Built-in micro SD/SDHC/SDXC slot, Built-in Audio/Alarm I/O, Hik-Connect cloud service,
- HDMI output: 1920×1080@50/60 Hz, 1280×720@50/60 Hz



DS-2CD1363G2P-LIUF/SL

- 2*1/2.5" Progressive Scan CMOS stitched, up to 180° wide angle
- 3632 × 1632: 20fps(P)/(N), 20:9
- H.265+/H.265/H.264+/H.264, WDR, ICR, IR or white light range up to 30m
- DC12V & PoE,
- Support mobile monitoring via Hik-Connect;
- *~F: Built-in SD card slot,



DS-2CD1T63G2P-LIUF/SL

- 2*1/2.5" Progressive Scan CMOS stitched, up to 180° wide angle
- 3632 × 1632: 20fps(P)/(N), 20:9
- H.265+/H.265/H.264+/H.264, WDR, ICR, IR or white light range up to 30m
- DC12V & PoE
- Support mobile monitoring via Hik-Connect;
- *~F: Built-in SD card slot
- *power supply is not included

Jelajahi fitur-fitur menakjubkan dari **Kamera PT**

Geser dan miringkan

Penyesuaian jarak jauh yang mudah dari berbagai sudut melalui Hik-Connect

IP66



Water Resistance

2/4 MP



Pan: 0° to 345°

Tilt: 0° to 80°



DS-2DE3404W-DE

DS-2DE3204W-DE

- High quality imaging with 4 MP / 2MP resolution
- Clear imaging against strong back lighting due to 120 dB WDR technology
- Pan and tilt ability enables camera to monitor zones of interest
- 4 × optical zoom allows for closer viewing of subjects in expansive areas
- Color: 0.1lux/F2.0, B/W: 0.01lux/F2.0,
- Angle of View: 80~33.5 degree (Wide~Tele),
- Pan range: 0°~350°; Tilt range: 0°~90°(Auto Flip),
- PoE&12VDC



DS-2DE2C400MWG dual-light

DS-2DE2C200MWG dual-light

- 4MP/2MP, IP66, two-way Audio, Human Detection & Tracking
- 1/2.7 Progressive Scan CMOS, Color: 0.01 Lux @ (F1.2 AGC ON), B/W: 0 Lux with IR, 2.8 mm, horizontal FOV 105°, vertical FOV 58°, diagonal FOV 123°, 4 mm, horizontal FOV 81°, vertical FOV 44°, diagonal FOV 97°, White Light Distance: up to 30 m IR Distance: up to 30 m, Digital WDR, BLC, HLC, 3D DNR, Built-in Microphone, Built-in Speaker, IP 66, POE



DS-2DE2A404IW-DE3(2.8-12mm)

- 4MP, 1/3" CMOS, H.265+/H.265/H.264+/H.264 codec 3D DNR, ICR, Color:
- 0.005lux/F1.6, B/W: 0.001lux/F1.6,
- 4x optical zoom, Angle of View: 100° to 33° (Wide~Tele), Digital Zoom: 16X,
- 4MP : 2560 × 1440:30fps, Pan range: 0°~330°; Tilt range: 0°~90°(Auto Flip), Pan Speed: 0.1°~100°/s,
- Tilt Speed: 0.1°~100°/s, 20m IR, POE&12VDC



DS-2DE425IW-DE

DS-2DE4225IW-DE

DS-2DE4215IW-DE

- 4MP, 1/2.5" CMOS, H.265+/H.265/H.264+/H.264 codec, 3D DNR, True WDR,
- Ultra-low light Powered By DarkFighter Color: 0.005lux/F1.6, B/W: 0.001lux/F1.6,
- Optical Zoom: 25x/15x, Digital Zoom: 16X100m IR
- 4MP : 2560*1440:30fps; 2MP : 1920*1080:30fps. Pan Speed: 0.1°~80°/s, Tilt Speed: 0.1°~80°/s,
- PoE+&12VDC
- Smart Detection



DS-2SE3C204MWG-E/12

DS-2SE3C404MWG-E/14

- High quality imaging with 4 MP / 2MP resolution
- Clear imaging against strong back lighting due to 120 dB WDR technology
- Pan and tilt ability enables camera to monitor zones of interest
- 4 × optical zoom allows for closer viewing of subjects in expansive areas
- Color: 0.1lux/F2.0, B/W: 0.01lux/F2.0,
- Angle of View: 80~33.5 degree (Wide~Tele),
- Pan range: 0°~350°; Tilt range: 0°~90°(Auto Flip),
- PoE&12VDC



DS-2DE4A225IWG-E

DS-2DE4A425IWG-E

- High quality imaging with 4MP / 2MP resolution
- Excellent low-light performance via powered-by-DarkFighter technology
- Clear imaging against strong back lighting due to 120 dB WDR technology
- Pan and tilt ability enables camera to monitor zones of interest
- 25x optical zoom allows for closer viewing of subjects in expansive areas
- Up to 50m IR range ensures safety at night
- Water and dust resistant (IP66)



DS-2DE5225W-AE

DS-2DE5225W-AE3

- 1/2.5" CMOS, H.265+/H.265/H.264+/H.264 codec, 3D DNR, True WDR,
- Ultra-low light Powered By DarkFighter
- Color: 0.005lux/F1.6, B/W: 0.001lux/F1.6,
- Optical Zoom: 25x/15x, Digital Zoom: 16X100m IR
- 2MP : 1920*1080:30fps.
- Pan Speed: 0.1°~80°/s, Tilt Speed: 0.1°~80°/s, PoE+&12VDC
- Smart Detection



DS-2SE4C215MWG-E

DS-2SE4C225MWG-E

- Captures a large area and great details at the same time
- High quality imaging with 4 MP/2 MP resolution
- Excellent low-light performance with powered by DarkFighter technology and ColorVu technology
- Secures an expansive area with 15x / 25x optical zoom and 16 × digital zoom
- Supports WDR, HLC, BLC, 3D DNR, defog, regional exposure, regional focus
- Expansive night view with up to 100 m IR distance & 30 m white light
- Supports 12 VDC & PoE+

DS-2SE4C415MWG-E

DS-2SE4C425MWG-E

M-Series NVR

2 channels @ 32 MP, 8 @ 8 MP,
16 @ 4 MP, or 32 @ 1080p
decoding capacity

Up to 400 Mbps bandwidth
for 64-channel NVRs, even
with RAID enabled

8K or dual 4K resolution
output, and up to 14 TB
capacity per HDD



DS-7608NI-M2	128Mbps
DS-7608NI-M2/8P	128Mbps
DS-7616NI-M2	256Mbps
DS-7616NI-M2/16P	256Mbps

- Up to 256Mbps Bit Rate Input Max (up to 16-ch IP video),
- 16x4MP decoding capability, HDMI up to 8K,
- 2 SATA Interfaces, alarm I/O: 4/1, 380 1U case
- (xP) : up to 16 independent PoE network interfaces,



DS-7716NI-M4	256Mbps
DS-7716NI-M4/16P	256Mbps
DS-7732NI-M4	320Mbps
DS-7732NI-M4/16P	320Mbps

- 320Mbps Bit Rate Input Max (up to 32-ch IP video), 32x2MP decoding capability, 4 SATA
- Interfaces, 2 HDMI outputs (up to 8K), 1 eSATA, alarm I/O: 16/9, 1.5U case, 19"
- (xP) : 16 independent PoE network interfaces,



DS-7104NI-Q1/M	40Mbps
DS-7104NI-Q1/4P/M	40Mbps
DS-7108NI-Q1/M	60Mbps
DS-7108NI-Q1/8P/M	60Mbps

- 60Mbps Bit Rate Input Max (up to 4-ch IP video)
- 1 SATA interface, mini 1U case up to 6TB per HDD
- 2-ch 1080P, or 1-ch 7M max



DS-7604NXI-K1	40Mbps
DS-7608NXI-K1	80Mbps
DS-7616NXI-K1	160Mbps
DS-7608NXI-K2	80Mbps
DS-7616NXI-K2	160Mbps

- False alarm reduction for up to 4-ch 1080P;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream;
- Support 16 face libraries, up to 10,000 face pictures in total;
- Up to 160Mbps Bit Rate Input Max (up to 16-ch IP video),
- H.265+/H.265/H.264+/H.264 video formats
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7604NI-Q1	40Mbps
DS-7608NI-Q1	80Mbps
DS-7616NI-Q1	160Mbps
DS-7608NI-Q2	80Mbps

- Up to 160Mbps Bit Rate Input Max (up to 16-ch IP video),
- 1/2 SATA interface, standalone 1U case, alarm I/O: 4/1(optional)



DS-7604NI-Q1/4P	40Mbps
DS-7608NI-Q1/8P	80Mbps
DS-7608NI-Q2/8P	80Mbps
DS-7616NI-Q2/16P	160Mbps

- Up to 160Mbps Bit Rate Input Max (up to 16-ch IP video),
- 1/2 SATA interface, standalone 1U case, alarm I/O: 4/1(optional)
- (xP) : Up to 16 port independent PoE network interface



DS-7604NXI-K1/4P	40Mbps
DS-7608NXI-K1/8P	80Mbps
DS-7608NXI-K2/8P	80Mbps
DS-7616NXI-K2/16P	160Mbps

- False alarm reduction for up to 4-ch 1080P;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream; Support 16 face libraries, up to 10,000 face pictures in total;
- Up to 256 Mbps incoming bandwidth, Max (up to 32-ch IP video),
- (xP) : 16 independent PoE network interfaces,
- H.265+/H.265/H.264+/H.264 video formats
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7716NXI-K4	160Mbps
DS-7716NXI-K4/16P	160Mbps
DS-7732NXI-K4	256Mbps
DS-7732NXI-K4/16P	256Mbps

- False alarm reduction for up to 4-ch 1080P;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream;
- Support 16 face libraries, up to 10,000 face pictures in total;
- Up to 256 Mbps incoming bandwidth,
- Max (up to 32-ch IP video), (xP) : 16 independent PoE network interfaces,
- H.265+/H.265/H.264+/H.264 video formats
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



DS-7716NXI-I4/S	256Mbps
DS-7716NXI-I4/16P/S	256Mbps
DS-7732NXI-I4/S	256Mbps
DS-7732NXI-I4/16P/S	256Mbps

- False alarm reduction for up to 4-ch 1080P;
- Facial Recognition for up to 4 channels picture stream or 1 channels video stream;
- Support 16 face libraries, up to 10,000 face pictures in total;
- Up to 256 Mbps incoming bandwidth,
- Max (up to 32-ch IP video),
- (xP) : 16 independent PoE network interfaces,
- H.265+/H.265/H.264+/H.264 video formats
- Adopt Hikvision Acusense technology to minimize manual effort and security costs



SSD NVR series H.265 Series

DS-E04NI-Q1(1TB SSD)
DS-E04NI-Q1/4P(1TB SSD)

- Powered by eSSD 1TB technology
- Low power consumption
- H.265+/H.265/H.264+/H.264 video compression
- Up to 40 Mbps incoming bandwidth, and 60 Mbps outgoing bandwidth
- Up to 4-ch network camera inputs
- Up to 4-ch 1080p decoding capability

Pemecahan masalah jarak jauh



Manajemen berbasis cloud terpadu untuk sistem keamanan

Topologi jaringan dalam genggam Anda

Hikvision Smart Managed Switches

Video Cerdas, Jaringan yang Lebih Pintar

Semua di Ponsel



Manajemen Topologi yang Divisualisasikan



Pemantauan Kesehatan Jaringan yang Efisien



Notifikasi Alarm Real-Time



Kontrol & Preview Video yang Nyaman



DS-3E1105P-EI

DS-3E1309P-EI

- L2, Smart Managed, Up to 8 x 10/100M
- RJ45 PoE ports, 1 10/100 Mbps or Gigabit RJ45 port,
- 802.3af/at, PoE power budget 110W, Max. 300 meter PoE transmission,
- Supports Hik-Central/iVMS 4200/
- HikPartner-Pro Unified Topology
- Management, cloud management, health monitor



DS-3E1510P-SI

DS-3E1518P-SI

DS-3E1526P-SI

- L2, Smart Managed, Up to 24 Gigabit
- PoE ports, 2 Gigabit SFP ports,
- 802.3af/at, PoE power budget up to 370W, max. 300 meter long distance
- PoE transmission, PoE watchdog, VLAN, QoS, SNMP, Port Mirroring, Storm Control, Visualized
- Topology Management, Network Health
- Monitor, Real-Time Alarm Push and Video Control and Preview



DS-3E1318P-EI

DS-3E1326P-EI

- L2, Smart Managed, 16 10/100M RJ45 PoE ports, 2 Gigabit combo ports, 802.3af/at,
- PoE power budget 230W, Max. 300 meter long distance PoE transmission,
- Visualized Topology, Management,
- Network Health Monitor, Real Time Alarm,
- Push and Video Control and Preview



DS-3E1505P-EI/M

DS-3E1506P-EI/M

DS-3E1510P-EI/M

DS-3E1518P-EI/M

DS-3E1526P-EI/M

- L2, Smart Managed, 24 Gigabit RJ45 PoE ports, 1 Gigabit RJ45 port, 1 Gigabit SFP port, 802.3af/at,
- PoE power budget 230W, HPP Cloud managed, VLAN, STP/RSTP loop, preference, PoE watchdog, Max. 300 meter
- PoE transmission, Rack mount



DS-3E1505P-EI

DS-3E1506P-EI

DS-3E1510P-EI

DS-3E1518P-EI

DS-3E1526P-EI

- L2, Smart Managed, 24 Gigabit RJ45 PoE ports, 1 Gigabit RJ45 port, 1 Gigabit SFP port, 802.3af/at,
- PoE power budget 370W, HPP Cloud managed, VLAN, STP/RSTP loop, preference, PoE watchdog, Max. 300 meter
- PoE transmission, Rack mount

PoE-Switch

Cerdas • Kokoh • Aman



Unmanaged Desktop Plastic



DS-3E0105D-O

DS-3E0108D-O

DS-3E0505D-O

DS-3E0508D-O

Unmanaged 100 Mbps Metal



DS-3E0105-O

DS-3E0108-O



DS-3E0116R-O

Unmanaged Gigabit Metal



DS-3E0105-O

DS-3E0108-O



DS-3E0516-E(C)

DS-3E0524-E(C)



DS-3E0105P-E/M

DS-3E0106P-E/M

DS-3E0109P-E/M



DS-3E0310P-E/M

DS-3E0318P-E/M

DS-3E0326P-E/M



DS-3E0105P-E/M

DS-3E0106P-E/M

DS-3E0109P-E/M

DS-3E0310P-E/M



DS-3E0105P-E

DS-3E0109P-E

DS-3E0318P-E

DS-3E0326P-E



DS-3E0105P-E

DS-3E0109P-E

DS-3E0318P-E

DS-3E0326P-E

- L2, Unmanaged, Up to 8 x 10/100M RJ45 PoE ports, 1 x 10/100M RJ45 uplink port,
- 802.3af/at, PoE power budget 60W, max.
- 250m long distance transmission, 6KV surge protection

- L2, Unmanaged, Up to 24 x 10/100M RJ45 PoE ports, 1 Gigabit RJ45 uplink port, 1 Gigabit SFP uplink port,
- 802.3af/at, PoE power budget up to 230W, "Extend" Mode port up to 250meter, 6KV surge protection

- L2, Unmanaged, 8 10/100M RJ45 PoE ports, 2 Gigabit RJ45 uplink ports, 802.3af/at,
- PoE power budget 60W, max. 300m long distance transmission, 6KV surge protection

- L2, Unmanaged, Up to 24 x 10/100M RJ45 PoE ports, 2 Gigabit combo ports,
- 802.3af/at, PoE power budget up to 370W, "Extend" Mode ports support up to 250 meter, 6KV surge protection

- L2, Unmanaged, 24 10/100M RJ45 PoE ports, 2 Gigabit combo ports, 802.3af/at,
- PoE powerbudget 370W, ports 17 24 support up to 300meter, 6KV surge protection, PoE watchdog, port isolation



Video Intercom System

See Clearly. Upgrade Easily.

- Kualitas Gambar Luar Biasa
- Untung Besar dengan Mudah
- Siap Pakai, Tanpa Ribet
- Kontrol Mulus, Manajemen Terpadu



DS-KV8113-WME1

- 2 MP camera with IR supplement
- One nametag button calling design for easier calls
- Built in card reader module
- Standard PoE power supply
- IK08 & IP65 higher protection level with aluminum alloy material
- Convenient Hik Connect APP mobile control



DS-KH6320-WTE1

- 7" Touch Screen Indoor Station,
- 7 inch Colorful TFT LCD, display resolution: 1024 * 600
- 10/100Mbps Ethernet, Wi-Fi 802.11b/g/n
- standard PoE / 12 VDC TF card, max 32G
- 8 ch alarm input, 2x alarm output, 1x485



DS-KB8113-IM

- 2MP HD Camera with IR supplement providing excellent image quality
- Supports standard POE power supply
- Supports mechanical doorbell, easier to call
- Convenient Hik Connect APP Mobile
- Control: Receive calls, open the door and live view remotely
- Supports web configuration
- Higher protection level: IK09 & IP65



DS-KIS702Y

- IP video intercom kit for villa or house, only one call button.
- DS-KD8003-IME2/Surface x1;
- DS-KH6320-WTE2 x1;
- DS-KAD704 x1;
- DS-KAW30-2N x1;
- 16GB TF card x1;



DS-KIS202 (NEW)

- Analog Kit
- Kit including DS-KB2411-IM and DS-KH2220
- Include one monitor, one outdoor panel,
- 5-meter 4-wire cable, and other accessories
- you have to mark which standard adapter
- you want when you place an order



DS-KIS203 (NEW)

- Water Proof Analog Kit
- Kit including DS-KB2421IM and DS-KH2220
- Include one monitor, one metal outdoor panel,
- 5-meter 4-wire cable, and other accessories
- you have to mark which standard adapter
- you want when you place an order



DS-KIS604-P

DS-KIS606-P

- IP video intercom kit for villa or house, only one call button.
- DS-KV8113-WME1 x1;
- DS-KH6320-WTE1 x1;
- 4 port standard PoE switch x1; (for KIS604-S)
- PSU x2; (for KIS604-P)
- 16GB TF card x1;
- No need additional power supply, but you have to mark which standard of power line type of the PoE switch you want when you place an order. (for KIS604-S) It includes 2 European power adapters, if you want to change the standard of power supply, you have to mark which standard of power adapter you want when you place an order. (for KIS604-P)

Akses Kontrol & Mesin Absensi



DS-K1A8503MF/EF

DS-K1T8003MF/EF

2.4-inch LCD Display

- A8503 : Fingerprint Access Control Terminal
- T8003 : Fingerprint Time Attendant Terminal
- Built-in Mifare card reading module,
- Communication: TCP/IP EHome;
- 1000 users, 1000 fingerprints 1000 card and Max. ~100,000 event records;
- 8003 Support Access Control and Time Attendance Function,
- A8503 Support Time Attendance Only , Optical Fingerprint Module;
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- multiple languages: English, Vietnamese, Brazilian Portuguese, Spanish, French, Italian, Arabic, and Thai
- Remotely opens door via Hik-Connect mobile client
- Tamper alarm, color silver



DS-K1T804AMF

DS-K1T804AEF

- 2.4 inch LCD Display Standalone Access Control Terminal, Built-in Mifare card (M) or EM card (E) reading module,
- Storage with 3,000 cards, 3,000 fingerprints and 100,000 access control events;
- Support Access Control and Time Attendance Function, Optical Fingerprint Module;
- Uplink Communication: TCP-IP, WIFI; Supports Wiegand, Supports ISUP5.0, ISAPI
- Multiple languages: English, Spanish, Italian, French, Portuguese (Brazilian),
- Vietnamese, Arabic, Thai, Turkish, Indonesian, Ukrainian



DS-K1T801M

- Standalone Access Control Terminal, Built-in Mifare card reading module,
- Storage with 3,000 cards; 12 Keys keyboard and doorbell, DC 12V/1A



DS-K1T320MFX

- Face Recognition Terminal, 2.4-inch LCD screen, 2 Mega pixel wide-angle lens, Built-in Mifare card reading module
- E: EM / M – Mifare card reading module
- Max.500 faces capacity Max.1,000 fingerprints capacityMax.1,000 cards
- Face recognition in dark environment
- Supports TCP/IP,DC 12V/1A
- Supports ISUP5.0, ISAPI
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- W: WIFI
- multiple languages: English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Japanese, Korean
- Configuration via the web client
- Face Recognition Accuracy Rate > 99% - Face Recognition Duration(t:N) ≤0.2s



DS-K1T321MFX

DS-K1T321EFX

DS-K1T321MFXW

- Face Recognition Terminal, 2.4-inch LCD screen,2 Mega pixel wide-angle lens,Built-in Mifare card reading module
- E: EM card reading module
- Max.500 faces capacity Max.3,000 fingerprints capacity Max.3,000 cards
- Face recognition in dark environment
- Supports TCP/IP,DC 12V/1, Supports ISUP5.0, ISAPI
- Supports wiring with secure door control unit or card reader via RS-485
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- multiple languages: English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Japanese, Korean
- Configuration via the web client
- Face Recognition Accuracy Rate > 99%
- Face Recognition Duration(t:N) ≤0.2s
- Face Recognition Distance: 0.3m ~ 1.5m
- Application Situation: Indoor
- Power adapter included in the package European Standard



DS-K1T343MFX

DS-K1T805MBFWX

- Face Recognition Terminal (A : Time Attendance only) , 4.3-inch LCD touch screen,2 Mega pixel wide-angle lens,Built-in Mifare card reading module (M);
- Max.1,500 faces capacity Max.3,000 cards (M); Max.3,000 fingerprints capacity (F), up to 300,000 attendance records
- Face recognition in dark environment, IP65,
- Two-way audio with client software, indoor station, and master station
- Supports TCP/IP (Only T Model), DC 12V/1A, Supports ISUP5.0, ISAPI
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- (A) Support Local Attendance
- multiple languages: English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
- Configuration via the web client
- Face Recognition Accuracy Rate > 99%, Duration(t:N) ≤0.2s, Distance: 0.3m ~ 1.5m



DS-K1T342MX

DS-K1T342MFX

DS-K1T342MFWX

- Face Recognition Terminal, 4.3-inch LCD touch screen,2 Mega pixel wide-angle lens,Built-in Mifare card reading module;
- Max.1,500 faces capacity Max.3,000 cards;- Max.3,000 fingerprints capacity (F)
- Face recognition in dark environment, IP65, Configuration via the web client
- Two-way audio with client software, indoor station, and master station
- Supports TCP/IP, WiFi,DC 12V/1A, Supports ISUP5.0, ISAPI
- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
- multiple languages: English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
- Face Recognition Accuracy Rate > 99%, Duration(t:N) ≤0.2s, Distance: 0.3m ~1.5m



DS-K1T344MFX-E1

- Supports 4.5-inch LCD touch screen, 2 Mega pixel wide-angle lens, and built-in M1 card reading module
- Max.3000 faces capacity, Max.3000 fingerprints capacity, and Max.3000 cards
- Face Recognition Distance: 0.3 m to 1.5 m; Duration 0.2 s/User; Accuracy rate ≥ 99%
- Supports face, card, and PIN authentication
- Two-way audio with client software, indoor station, and main station. Physical button and touch button are supported
- Supports mobile web and PC web for configuration
- Supports powered by 12 VDC or PoE and supports powering for device and door lock.
- IP65
- Power adapter included in the packageEuropean Standard




DS-KIS606-P

- Network video intercom kit for villa
- One-press call button for easier calls
- Convenient Hik-Connect APP mobile control
- Device included: DS-KV6113-PE1(C) × 1, DS-KH6110-WE1 × 1, DS-KABV6113-RS × 1, PSU × 2
- Power adapter included in the package

Hikvision Wireless AP & AC Router

**Jaringan Lebih Cerdas,
Bisnis Lebih Mudah !**

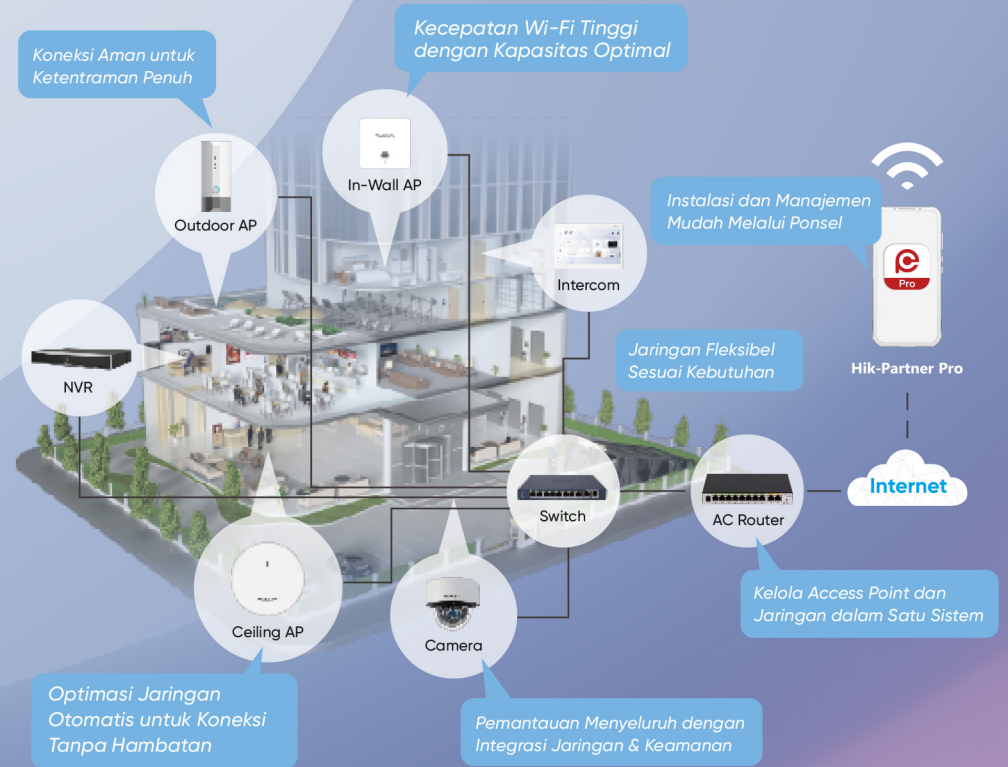

DS-3WAP522-SI

- 1200 Mbps Dual-band Wi-Fi 5 Gigabit ceiling mount indoor AP
- 2x2 MIMO, 1 Gigabit port with PoE in
- Max/Recommend user access is 256/80
- HPP/HC unified cloud app management
- Support batch managed via AC Router,
- Support standalone configuration via AP's web
- DC 12V(Note: power adapter is not included, suggest using POE for power supply, no need additional power adapter)



DS-3WAP622G-SI

- 1800 Mbps Dual-band Wi-Fi 6 Gigabit ceiling mount indoor AP, 2x2 MIMO, 1 Gigabit port with PoE in, Max/Recommend user access is 256/100, HPP/HC unified cloud app management, Support batch managed via AC Router, Support standalone configuration via AP's web, DC 12V(Note: power adapter is not included, suggest using POE for power supply, no need additional power adapter)



DS-3WAP521-SI

- 1200 Mbps Dual-band Wi-Fi 5 Gigabit in-Wall indoor AP, 2x2 MIMO, 2 Gigabit port with 1 PoE in, Max/Recommend user access is 128/50, HPP/HC unified cloud app management, Support batch managed via AC Router, Support standalone configuration via AP's web, 86 mm standard wall junction box



DS-3WAP623E-SI

- 3000 Mbps Dual-band Wi-Fi 6 Gigabit outdoor AP, 2x2 MIMO, 1 Gigabit port with PoE in, IP68, Max/Recommend user access is 256/100, HPP/HC unified cloud app management, Support batch managed via AC Router, Support standalone configuration via AP's web, DC 12V(Note: power adapter is not included, suggest using POE for power supply)



DS-3WG105G-SI / DS-3WG105GP-SI

DS-3WG210GP-SI / DS-3WG507G-SI

- Concurrent Users 100, Up to 4 WAN Loadbalancing, 2 Gigabit WAN Ports with 1 WAN/LAN Switchable, 3 Gigabit LAN Ports with 2 LAN/WAN Switchable, 32 APs, IPSec throughput 100Mbps, 40K Concurrent sessions, Desktop/Wall

Kecepatan Koneksi Lancar di Setiap Kesempatan

Router Nirkabel Hikvision

Memberikan pengalaman online yang paling cerdas & Berkecepatan tinggi



Antena 5-dBi

Antena omnidirectional yang sangat sensitif



Sinkronisasi Akun

Dapatkan akun broadband secara otomatis dari router sebelumnya



Dual Band

Auto switch antara sinyal 2,4 & 5 GHz



Manajemen yang Nyaman

Mendukung web dan Aplikasi Hik-Connect dengan fungsi yang luas



Beamforming

Sesuaikan bentuk gelombang ke balok agregat ke arah pengguna



MU-MIMO

Koneksi serentak dan lancar dengan lebih banyak perangkat



DS-3WR3N

- 5-dBi amplified antennas
- Dual antennas for maximum coverage
- Supports IPTV
- Data Rate: 2.4 GHz: 300 Mbps Antenna: Two 5-dBi amplified antennas Wireless Standard: IEEE 802.11b/g/n @ 2.4 GHz
- Working Frequency Band: 2.4 GHz



DS-3WR12C

- Four 5-dBi amplified antennas
- Beamforming optimizes signal
- Dual band - Smart signal switching
- Broadband account synchronization
- Data Rate: 5 GHz: 867 Mbps; 2.4 GHz: 300 Mbps
- Antenna: Four 5-dBi amplified antennas Wireless Standard: IEEE 802.11/a/n/ac wave
- 2 @ 5 GHz; IEEE 802.11b/g/n @ 2.4 GHz
- Working Frequency Band: 2.4 GHz, 5 GHz



DS-3WR15X

- AX1500M Dual-band WiFi 6 wireless router,
- 5GHz: 1201Mbps + 2.4GHz
- 300Mbps, 3 x 1000 Mbps LAN ports, 1 x 1000 Mbps WAN port, 4 x high gain antennas, Hik-Connect App



DS-3WR12GC

- Four 5 dBi amplified antennas
- Beamforming optimizes signal
- Beamforming optimizes signal
- Dual band Smart signal switching
- Dual band Smart signal switching
- Broadband account synchronization



DS-3WR4G12C

- AC1200 Dual band Wi Fi
- 4G Boost Faster Speed
- Instantly Access a Mobile Network With a SIM Card



DS-3WF0FC-2N/O Outdoor

- 2.4GHz wireless bridge CPE,
- Max.distance 1km,
- 2x2 MIMO antenna with 300Mbps throughput,
- 7dBi gain, 802.11n, Angle H: 35°, 2 100Mbps RJ45 ports,
- Support 12 VDC or Passive PoE Power supply,
- Support Web, iVMS-4200, HCP



DS-3WF02-5AC/D Outdoor

- 5GHz wireless bridge CPE,
- Max.distance 5km,
- 2x2 MIMO antenna with 867Mbps throughput,
- 12dBi gain, output power 22dBm,
- 802.11a/n/ac, Angle H: 35°, 2 x 10/100 Mbps RJ45 ports,
- Support Standard PoE input&Output



DS-3WF0BC-2NT Elevator

- 2.4GHz wireless bridge,
- Max.distance 200m,
- 72Mbps throughput, IEEE 802.11n,
- Angle H: 50° V: 50°, 110/100M RJ45,
- support 12 VDC/1A,
- support passive PoE input

Wireless Bridges

Menjembatani Efisiensi dengan Konektivitas Nirkabel Tanpa Batas

Kenapa butuh wireless bridge?



Jarak Jauh

Alternatif hemat biaya untuk jaringan di daerah pedesaan



Jaringan yang fleksibel

Memungkinkan koneksi di tempat yang sulit dijangkau kabel seperti hutan dan lokasi konstruksi



Menghemat waktu dan biaya

Dapat diandalkan di lingkungan yang dinamis seperti poros elevator



Pemilihan channel otomatis untuk kestabilan



Elevator A



Elevator B



Elevator C



Apa yang ditawarkan oleh wireless bridge hikvision?



- IP55** perlindungan terhadap Debu dan percikan Air
- 30° C to 70° C** Beroperasi stabil di segala kondisi suhu
- Outdoor UV** Proteksi Sinar UV

Hikvision Monitor

Monitor Profesional untuk Performa yang Maksimal



Brightness
200 Nits



Contrast Ratio
1000:1



Panel IPS

Resolusi
1366 X 768



22"
+ AUDIO

DS-D5022F2-1V2S

- 21.5" VA , 100Hz refresh rate
- HDMI/VGA input
- Audio Input, Speaker included,
- Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms.



22"

DS-D5022F2-1P2

- 21.5", IPS, 100Hz refresh rate
- HDMI/VGA input,
- Audio output
- Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms.



24"

DS-D5024F2-AV2

- 23.8" 1080P, VA, 100Hz refresh rate,
- HDMI/VGA input, ,
- view angle:178°/178°, 7ms Response Time, 12V DC,7*16h



24"
+ AUDIO

DS-D5024F2-BV2S

- 23.8" 1080P,VA, 100Hz refresh rate
- HDMI/VGA input
- Build in speaker
- view angle:178°/178°, 7ms Response Time, 12V DC,7*24h



19"

DS-D5019S0-1P0

- 18.5" 1366*768
- HDMI/VGA input,
- view angle:178°/178°
- plastic casing,
- ERP level A,VESA,
- 7*24h



22"
+ AUDIO

DS-D5022F2-1V2

- 21.5", VA,
- HDMI/VGA input,
- Audio Output,
- 100Hz, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms.

Hikvision Backup Series UPS

Daya Andal, Perlindungan Maksimal!

- ✓ **Built-in AVR** – Stabilkan tegangan listrik secara otomatis
- ⚡ **Super Fast Charging** – Isi daya lebih cepat, siap digunakan dalam waktu singkat
- ↔ **Wide Input Voltage Range** – Beradaptasi dengan berbagai kondisi listrik
- 🛡️ **Overload & Short Circuit Protection** – Mencegah kerusakan akibat beban berlebih dan korsleting
- ⚡ **Surge Protection** – Melindungi perangkat dari lonjakan listrik tiba-tiba



DS-UPS600

- Wide input voltage range 140-290 VAC;
- 12V/7Ah Battery x1



DS-UPS1000

- Wide input voltage range 140-290 VAC;
- 12V/9Ah Battery x1



DS-UPS2000

- 2000VA/1200W
- Wide input voltage range
- Built-in AVR
- Super fast charging
- Overload and short circuit protection
- LCD display
- Compact design
- USB port for remote control



DS-UPS3000

- 3000VA/1800W
- LCD display
- Wide input voltage range
- Built-in AVR
- Super fast charging
- Overload and short circuit protection
- USB port for remote control
- Compact design



DS-UPS01K24-R/TJS(O-STD)/EU

DS-UPS02K48-R/TJS(O-STD)/EU

DS-UPS03K72-R/TJS(O-STD)/EU

- 1/2/3 KVA, PF0.9
- single phase online double conversion UPS
- Rack mounted type with 2/4/6PCS of 9Ah built-in battery;
- multiple socket type selectable



DS-UPS06K-R/TJL(O-STD)/IEC

DS-UPS10K-R/TJL(O-STD)/IEC

- -Double conversion on-line design with input power factor correction (PFC) technology, achieving an input power factor of up to 0.99
- 6/10 KVA, IVR 110~300Vac
- Battery Type : Valve Regulated Lead Acid (VRLA), rack mounted type;



DS-UPS09192A-R/TJ

DS-UPS09240A-R/TJ

- External battery pack for use with 6/10KVA UPS, with 16PCS/20 PCS of 9Ah built-in battery;


DS-TMG30X Series

Opsi yang cocok untuk pengguna baru, stabil, dan hemat biaya,
dirancang khusus untuk kebutuhan pasar distribusi



Keamanan Maksimal

Tiang boom anticollision akan terlepas jika terkena kendaraan, mencegah kerusakan



Rebound Otomatis

Tiang kembali ke posisi semula jika menyentuh kendaraan atau pejalan kaki



Desain Minimalis

Mudah dipasang di ruang sempit dengan fleksibilitas tinggi



Kontrol Darurat

Remote control siap digunakan meskipun sistem offline



Penyesuaian Panjang yang mudah

Tiang telescopic Seri 30 dapat diatur sesuai kebutuhan



Daya yang Fleksibel

Mendukung 110-240VAC, Standar 220V.



DS-TMG300-DR(3.4-6m)

- Motor: DC brushless motor
- Barrier Boom: 3.4m-6m telescopic pole, right direction
- Rising Speed: 6 s
- Falling Speed: 6 s
- MCBF: 2,500,000
- Power Supply: 220 VAC
- Protect Level: IP54
- Working Temperature: -30 °C to 70 °C (-22 °F to 158 °F)
- Barrier Housing Material: Cold-rolled sheet
- Barrier Housing Color: Black background with silver pattern



DS-TCG406-E

- 4MP, 2688 × 1520, CMOS, 1/1.8", 25fps, 2.8-12mm and 8-32mm motorized lens
- Supplement Light: Embedded 2 LED lights (integrated white light and IR)
- Smart Recognition: vehicle type recognition (Car/Van/Bus/Truck/Others)
- vehicle color recognition (red, yellow, green, blue, purple, brown, white, grey, black)



Anti-fall Radar


- Transmitting frequency: 79GHz
- Working mode: Anti-fall Radar
- Beam width: Vertical 10°, Horizontal 38°, relay output
- Trigger distance: 0.3 to 6m (adjustable)
- Response Time: 50ms
- Detection target: Vehicle
- Power Supply: 9 to 12 VDC
- Weight: 350g
- Working Temperature: -40°C to 85°C



Vehicle Coil Detector

- Including 2 inputs of inductive loops
- Recognizes vehicles of more than two wheels
- Fastest Response Time: 3.5ms
- Output Port: 2 relay output, VDRM 70 V, max. current 30 mA
- Working Temperature: -30 °C to 70 °C (-31 °F to 167 °F)
- Power Supply: DS-TMG022(110V): 88 to 132 VAC, 50 to 60 Hz; DS-TMG022(220V): 176 to 264 VAC, 50 to 60 Hz

■ Dapatkan informasi produk dan promosi dengan mudah

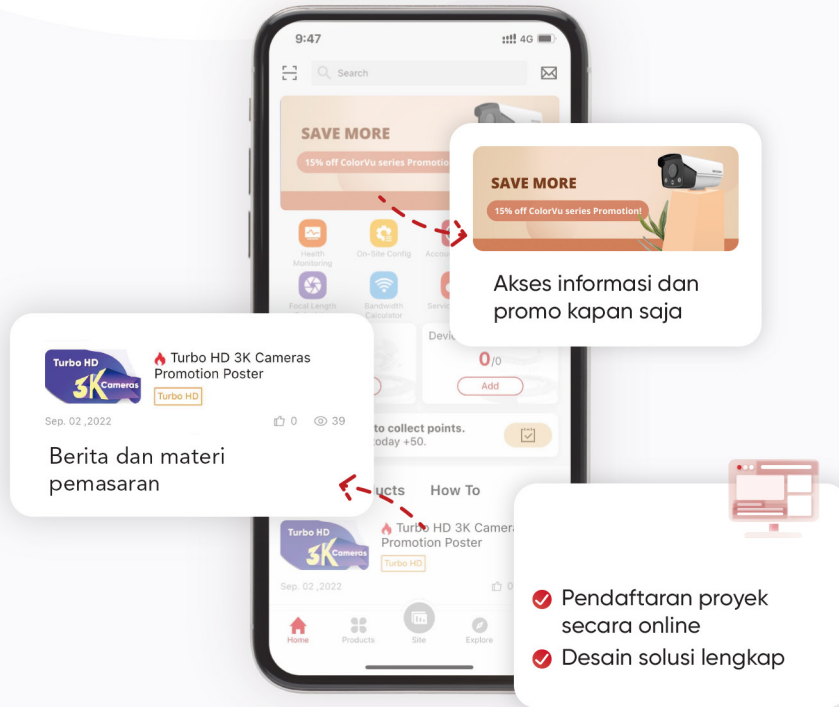

■ Nikmati pemeliharaan dan pengelolaan perangkat dari jarak jauh



Hik-Partner Pro
Scan & download
Aplikasinya



Kunjungi Website Resmi
Hik-Partner Pro melalui URL :
www.hik-partner.com

■ Solusi layanan cerdas untuk bisnis yang terus berkembang



Perluas jangkauan bisnismu dengan co-branding, tampilkan logo dan informasi brand kamu bersama Hikvision



Ciptakan pendapatan berkelanjutan melalui penyimpanan cloud dan VMS berbasis cloud



Tukarkan poin dengan hadiah dan layanan



Berita & Promosi



Hadiah




Pemeliharaan Jarak Jauh



Dapatkan Penghasilan Tambahan



HIKVISION SERVICE CENTER

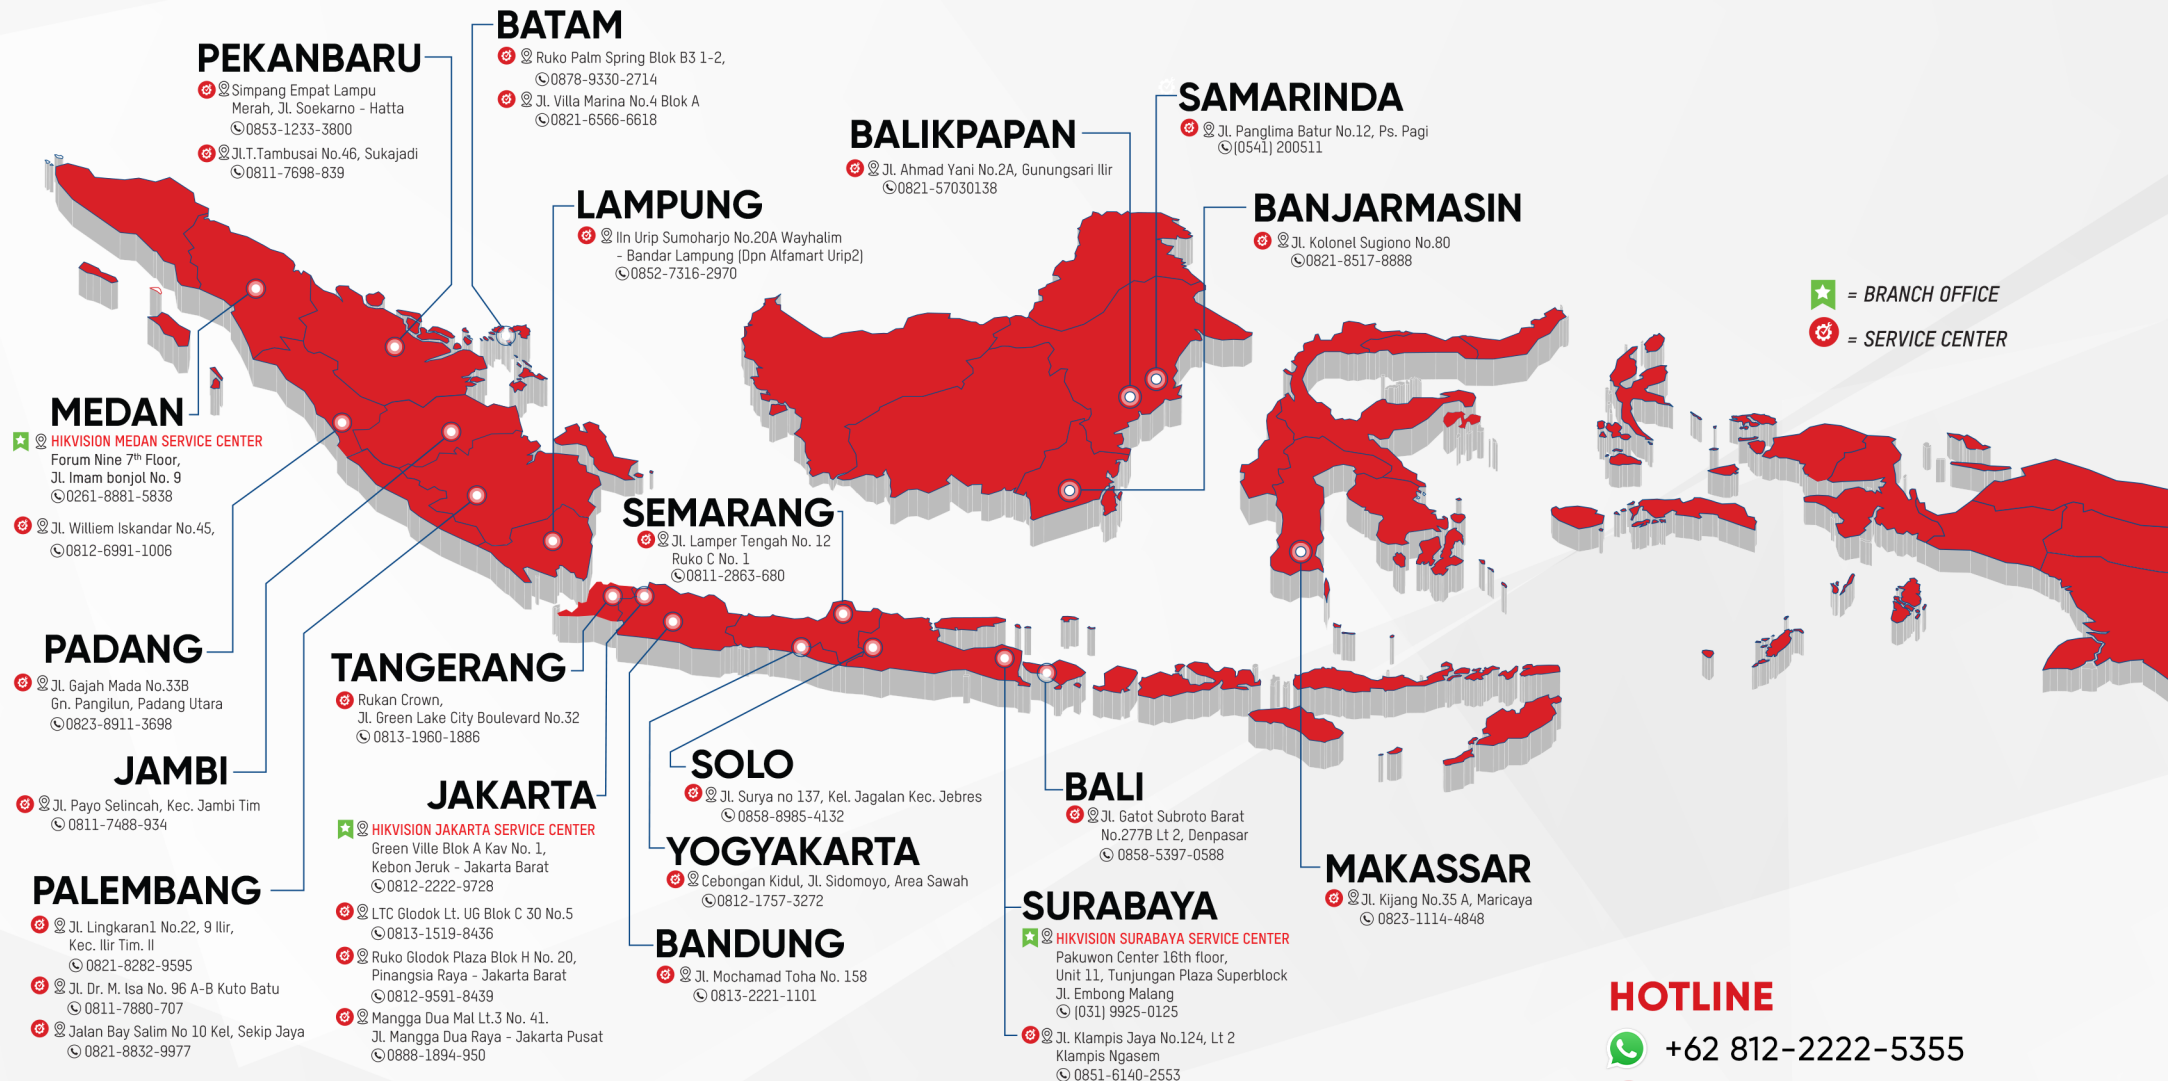

HOTLINE

📞 +62 812-2222-5355

📧 Service.id@hikvision.com

Katalog Retail Hikvision 2025

PT. HIKVISION TECHNOLOGY INDONESIA

Head Office

DKI Jakarta

APL Tower Lt. 15 Unit T1, T8, T9
Jl. Letjen S. Parman Kav. 28
Jakarta 11470
(021) 29339366

Branch Office

Surabaya

Pakuwon Center 16th Floor, Unit 11
Tunjungan Plaza Superblock
Jl. Embong Malang No. 1,3 & 5
Surabaya 60261
(031) 99250125

Medan

Forum Nine 7th Floor
Jl. Imam Bonjol No. 9
Medan Petisah, Medan
Sumatera Utara 20112
(061) 88815838



Scan Mobile PDF